

2008



PROFILI STANDARD PER L'INDUSTRIA DEL MOBILE

STANDARD PROFILES
FOR FURNITURE INDUSTRY

PROFILES ET JOINTS
POUR L'INDUSTRIE DU MEUBLE

STANDARDPROFILE
FÜR DIE MOBELINDUSTRIE



BMP

ΓΙΑ ΤΗ ΒΙΟΜΗΧΑΝΙΑ ΕΠΙΠΛΟΥ / FOR THE FURNITURE INDUSTRY

ΤΑ ΥΛΙΚΑ ΜΑΣ

Όλα τα προϊόντα που χρησιμοποιούμε στην παραγωγή είναι επιλεγμένα και δοκιμασμένα στο χημικό μας εργαστήριο. Συγκεκριμένα, τα περισσότερα υλικά με βάση το PVC είναι ειδικά μελετημένα από εμάς και επίσης παράγονται στα εργοστάσιά μας.

Ο κοινός τους παρονομαστής είναι η εξαιρετικά υψηλή αντοχή στην παλαίωση που εξασφαλίζει ότι τα αρχικά γνωρίσματα των εξελασμένων συστατικών παραμένουν αναλλοίωτα σε βάθος χρόνου. Ιδιαίτερη προσοχή έχει δοθεί στην ανάπτυξη και παραγωγή ειδικών υλικών που να ικανοποιούν τους ισχύοντες ιταλικούς κι ευρωπαϊκούς κανόνες για διαφορετικές εφαρμογές.

Η BMP διαθέτει άριστα εκπαιδευμένους τεχνικούς έτοιμους να βοηθήσουν τους πελάτες με το σχεδιασμό, τον καθορισμό των πλέον κατάλληλων υλικών, τη μελέτη για το ιδανικό ταίριασμα των χρωμάτων και την παραγωγή των εξαρτημάτων για την εξέλαση.

Όλα τα προϊόντα της BMP είναι πιστοποιημένα κατά ISO 9001 και πληρούν τις προϋποθέσεις του ευρωπαϊκού κανονισμού EN 12365.

ESAFLEX

Σειρά εύκαμπτων υλικών με βάση το PVC (πολυβινυλοχλωρίδιο) και συντομογραφία «F». Έχει αναπτυχθεί σύμφωνα με τις διαφορετικές βαθμίδες σκληρότητας της κλίμακας Shore A και πληρεί τις προϋποθέσεις για διάφορες εφαρμογές. Η ευρεία και δοκιμασμένη αυτή σειρά πληρεί τον κανονισμό UNI 9122.

ESAFLEX HC85

Αυτός ο τύπος υλικού είναι ειδικά σχεδιασμένος από την εταιρεία μας για την παραγωγή λαμπερών προφίλ που μπαίνουν γύρω από πάνελ.

Μπορεί να εφαρμοστεί γύρω από πάνελ με διαφορετικές ακτίνες και αντιστέκεται στην παλαίωση για περισσότερο από 10 έτη χωρίς σημαντικές αλλαγές στα φυσικά και μηχανικά του χαρακτηριστικά. Ως υλικό μπορεί να συγκολληθεί και να κολληθεί.

ESAFLEX N90

Αυτός ο τύπος υλικού έχει σχεδιαστεί από την εταιρεία μας ειδικά για την παραγωγή προφίλ που μπαίνουν γύρω από πάνελ.

Μπορεί να τοποθετηθεί γύρω από πάνελ με διαφορετικές ακτίνες και αντιστέκεται στην παλαίωση για περισσότερο από 10 έτη χωρίς σημαντικές αλλαγές στα φυσικά και μηχανικά του χαρακτηριστικά. Ως υλικό μπορεί να συγκολληθεί και να κολληθεί.

ESADUR

Σειρά άκαμπτων υλικών με βάση το PVC (πολυβινυλοχλωρίδιο) και συντομογραφία «R». Διαφέρουν από τα άλλα ως προς την αντοχή τους σε χτυπήματα. Είναι άφλεκτα, ανθεκτικά σε οξέα, με μικρή θερμική διαστολή και χαμηλούς συντελεστές θερμικής αγωγιμότητας.

DURFLEX

Σειρά συνεξελασμένων προϊόντων με συντομογραφία το «C», που προέρχονται από μία ταυτόχρονη εξέλαση δύο πλαστικών υλικών (ESADUR+ ESAFLEX) με διαφορετικά γνωρίσματα σκληρότητας κι ευκαμψίας. Η υψηλή ποιότητα των προϊόντων αυτών επιτρέπει διαφορετικές λύσεις σε διάφορες εφαρμογές.

ELAPRENE

Σειρά προϊόντων με συντομογραφία «EL», που προέρχονται από θερμοπλαστικό και θερμοσκληρυνόμενο ελαστομερές. Μπορούν να είναι μονοελασμένα ή συνελασμένα και πληρούν τον κανονισμό UNI 9122. Αντέχουν τέλεια υπό ακραίες συνθήκες θερμοκρασίας (από -30°C έως +85°C). Το κύριο χαρακτηριστικό τους είναι η ιδιαίτερα υψηλή ελαστική επαναφορά, καθότι λάστιχα, όπως επιβεβαιώνεται και στη δοκιμή Συμπίεσης. Τα Elaprene ενδείκνυνται επίσης και για χρήσεις με υδατοδιαλυτές βαφές.



1. Προσδιορισμός φορτίου Θραύσης UNI 5819.
2. Προσδιορισμός ποσοστιαίας επιμήκυνσης πριν τη θραύση UNI 5819.
3. Προσδιορισμός σκληρότητας UNI4916.
4. Διακύμανση βάρους ASTM D 471.
5. Διακύμανση όγκου BMP/Labs.
6. Μπλοκάρισμα BMP/Labs.

Δοκιμή Μπλοκαρίσματος

Προκειμένου να δοκιμαστεί η πραγματική επίδραση ενός συστήματος βαφής σε ένα παρέμβυσμα, κρίνεται σκόπιμο να αξιολογηθεί -πέρα από την όποια τροποποίηση των μηχανικών γνωρισμάτων- και η όποια μεταβολή στη λειτουργικότητα του παρεμβύσματος.

Υπό ορισμένες συνθήκες χρόνου και θερμοκρασίας, μπορεί να παρατηρηθούν φαινόμενα κολλήματος μεταξύ του παρεμβύσματος και του φύλλου του κουφώματος. Το φαινόμενο αυτό είναι γνωστό ως Μπλοκάρισμα.

Η BMP έχει αναπτύξει τη δική της μέθοδο για την ανάλυση του Μπλοκαρίσματος, λαμβάνοντας υπ' όψη ως βασικές παραμέτρους το «χρόνο», τη «θερμοκρασία» και την «πίεση της επαφής».

Μέθοδος δοκιμής Μπλοκαρίσματος

Ένα δείγμα επίπεδου παρεμβύσματος πιέζεται ανάμεσα σε δύο κομμάτια ξύλου βαμμένα με βαφή αραιωμένη με νερό.

Ένα βάρος 150 grams/cm² τοποθετείται στο επάνω μέρος.

Όλο μαζί μπαίνει στο φούρνο για 168 ώρες στους +80°C.

Κατά τη δοκιμή δεν παρατηρείται καθόλου κόλλημα μεταξύ του παρεμβύσματος και του κουφώματος που είναι βαμμένο με βαφή αραιωμένη με νερό.

ELAPRENE 64

Το υλικό αυτό είναι ένα πολυολεφινικό παράγωγο κι ανήκει στην κατηγορία των θερμοπλαστικών υλικών. Ως υλικό συγκολλάται εύκολα και εκτιμάται από τους κατασκευαστές κουφωμάτων PVC αφού η συγκόλληση γίνεται στην ίδια θερμοκρασία με αυτήν του άκαμπτου προφίλ που αποτελεί το κούφωμα. Ωστόσο, πρέπει να ληφθεί υπόψη ότι το υλικό δεν μπορεί να κολληθεί.

Η επιλογή αυτού του μίγματος είναι προτιμητέα όταν οι συνθήκες χρήσης είναι ακραίες αφού η εφαρμογή είναι σίγουρη από τους -40 °C ως τους +130 °C.

Είναι το απόλυτα ιδανικό υλικό για να χρησιμοποιηθεί με κουφώματα λακαρισμένα με βαφή αραιωμένη με νερό, καθώς δεν προκύπτουν ποτέ προβλήματα μπλοκαρίσματος.

EPDM Va.Le gruppo BMP

Σειρά προϊόντων από βουλκανισμένο ελαστικό EPDM, με συντομογραφία «DU» και «CS» (διεσταλμένο EPDM). Προσφέρουν άριστα φυσικά και μηχανικά χαρακτηριστικά, ώστε να εξασφαλίζουν μέγιστα αποτελέσματα σε ότι αφορά τις προδιαγραφές του κανονισμού UNI 9122. Έχουν τέλεια αντοχή στην οξείδωση, τις υπέρυθρες ακτίνες UV, και τους ατμοσφαιρικούς παράγοντες γενικά. Η κορυφαία μαλακότητα του διεσταλμένου υλικού επιτρέπει μέγιστη προσαρμοστικότητα στη σύνδεση.

SILENE

Η σειρά προϊόντων από ελαστικό σιλικόνης με συντομογραφία «SI», πληρεί τον κανονισμό UNI 9122. Το υλικό αυτό θεωρείται κορυφή σε ότι αφορά τις επιδόσεις. Επιδεικνύει υψηλή ελαστική επαναφορά, υψηλή αντοχή σε ατμοσφαιρικούς παράγοντες, κι εξασφαλίζει υψηλή λειτουργικότητα σε ακραίες θερμοκρασίες (από -40°C έως +100°C). Τα Silene επίσης ενδείκνυνται για εφαρμογές σε επαφή με δομικά σφραγίσματα σιλικόνης.

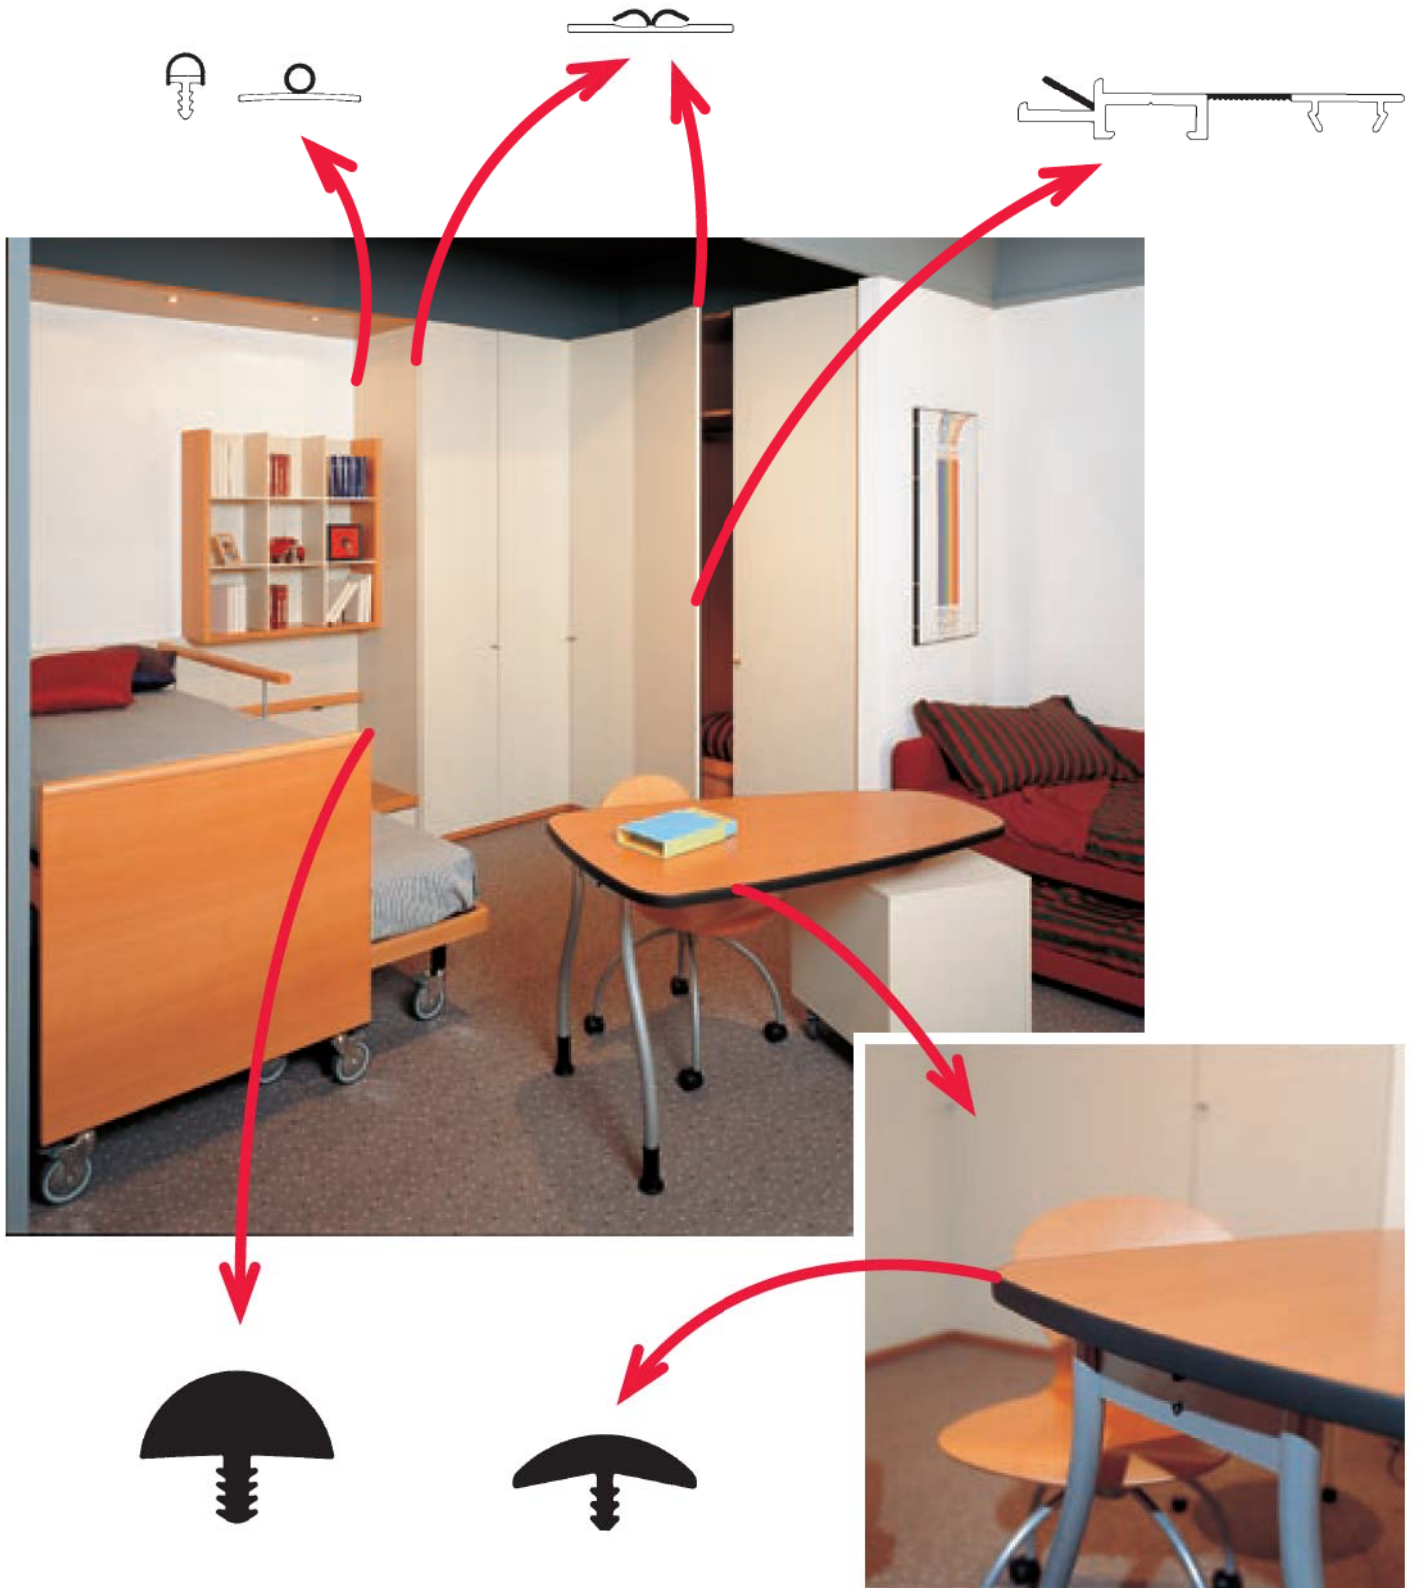
ESANYL

Σειρά υλικών με συντομογραφία «N», βασισμένα σε πολυαμίδη 6,6 και ενισχυμένα με fibre glass ώστε να είναι κατάλληλα για την παραγωγή προφίλ θερμικής κοπής και για μηχανισμούς κλειδώματος κουφωμάτων αλουμινίου. Παρουσιάζει άριστα θερμομηχανικά χαρακτηριστικά και κάνει εφικτή την παραγωγή προφίλ με στενές ανοχές διαστάσεων.

APPLICATION EXAMPLES




APPLICATION EXAMPLES




APPLICATION EXAMPLES



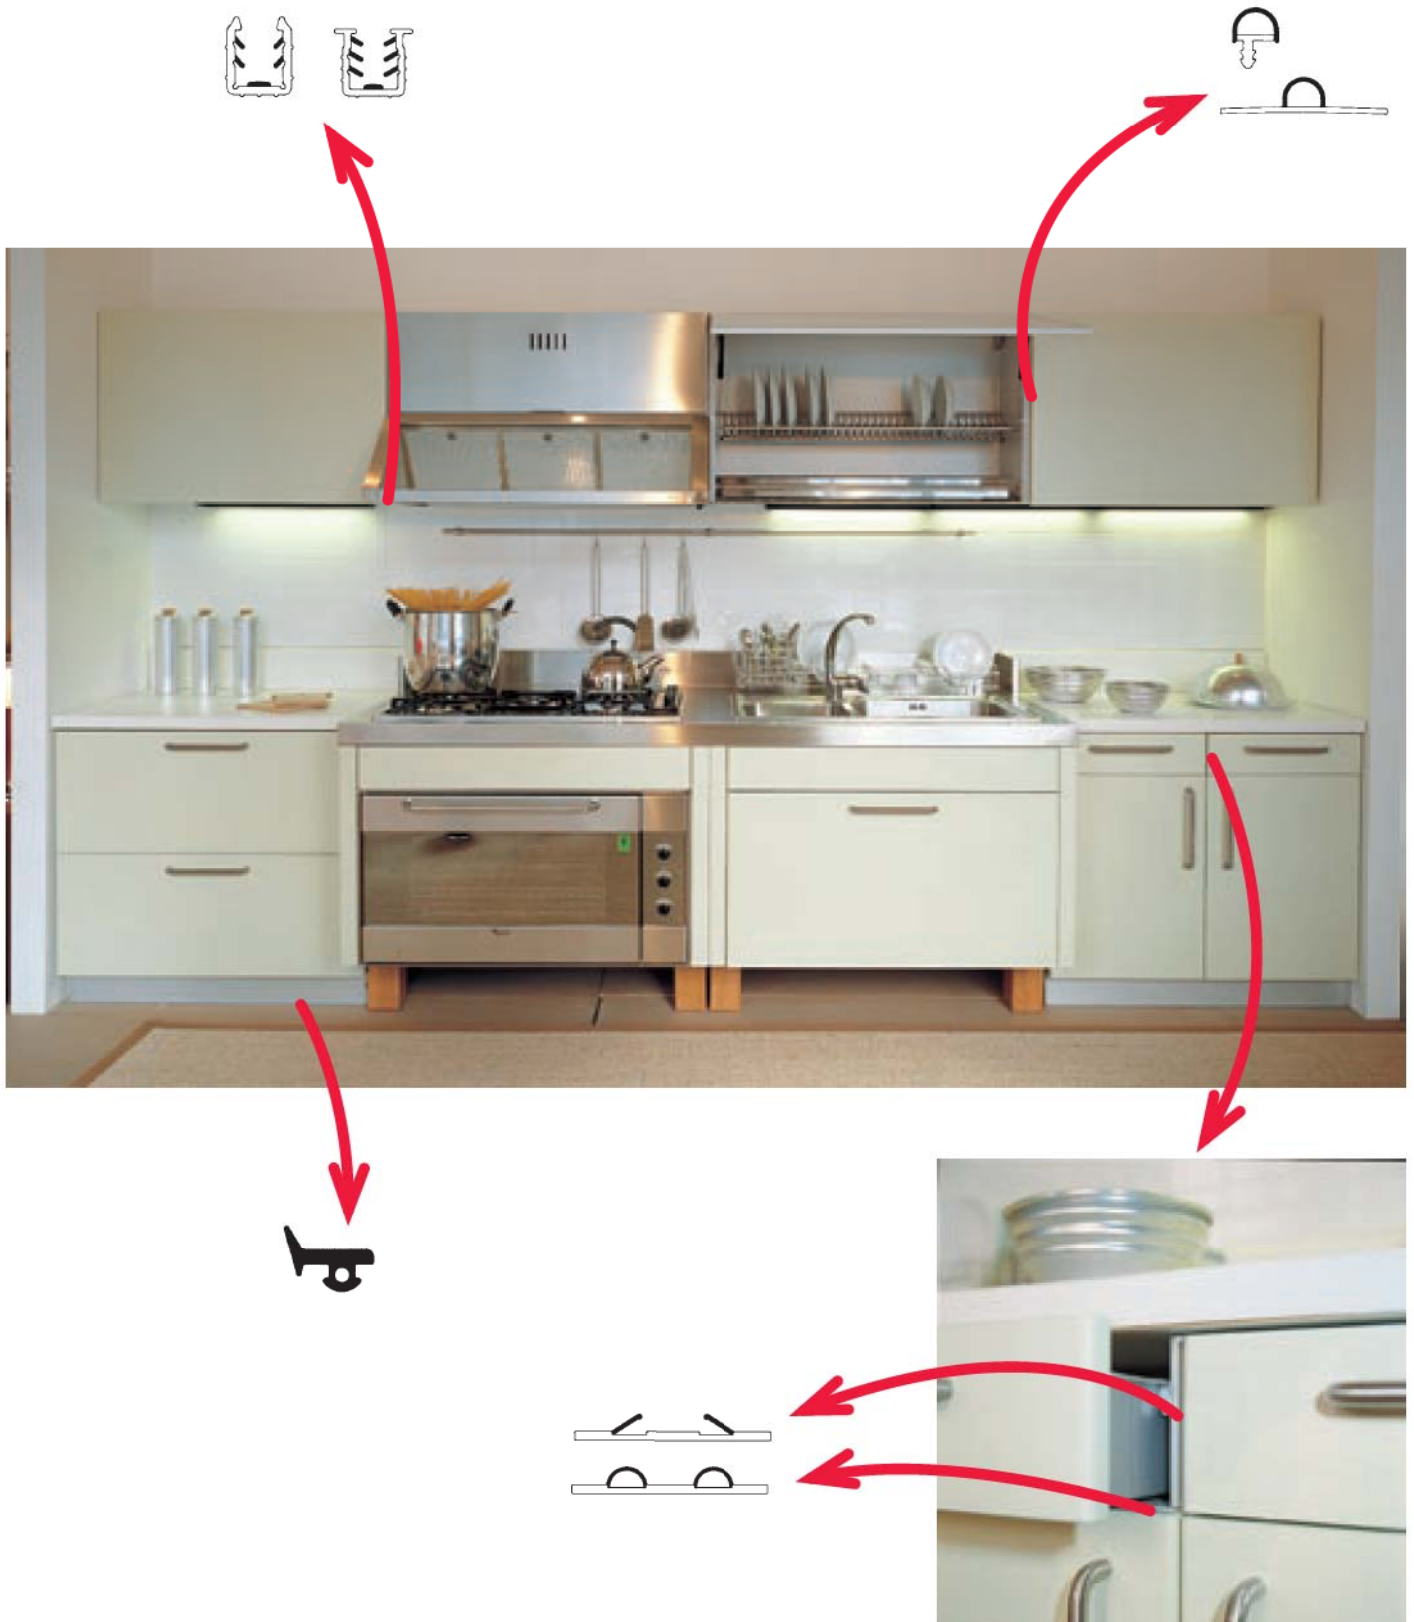
APPLICATION EXAMPLES




APPLICATION EXAMPLES

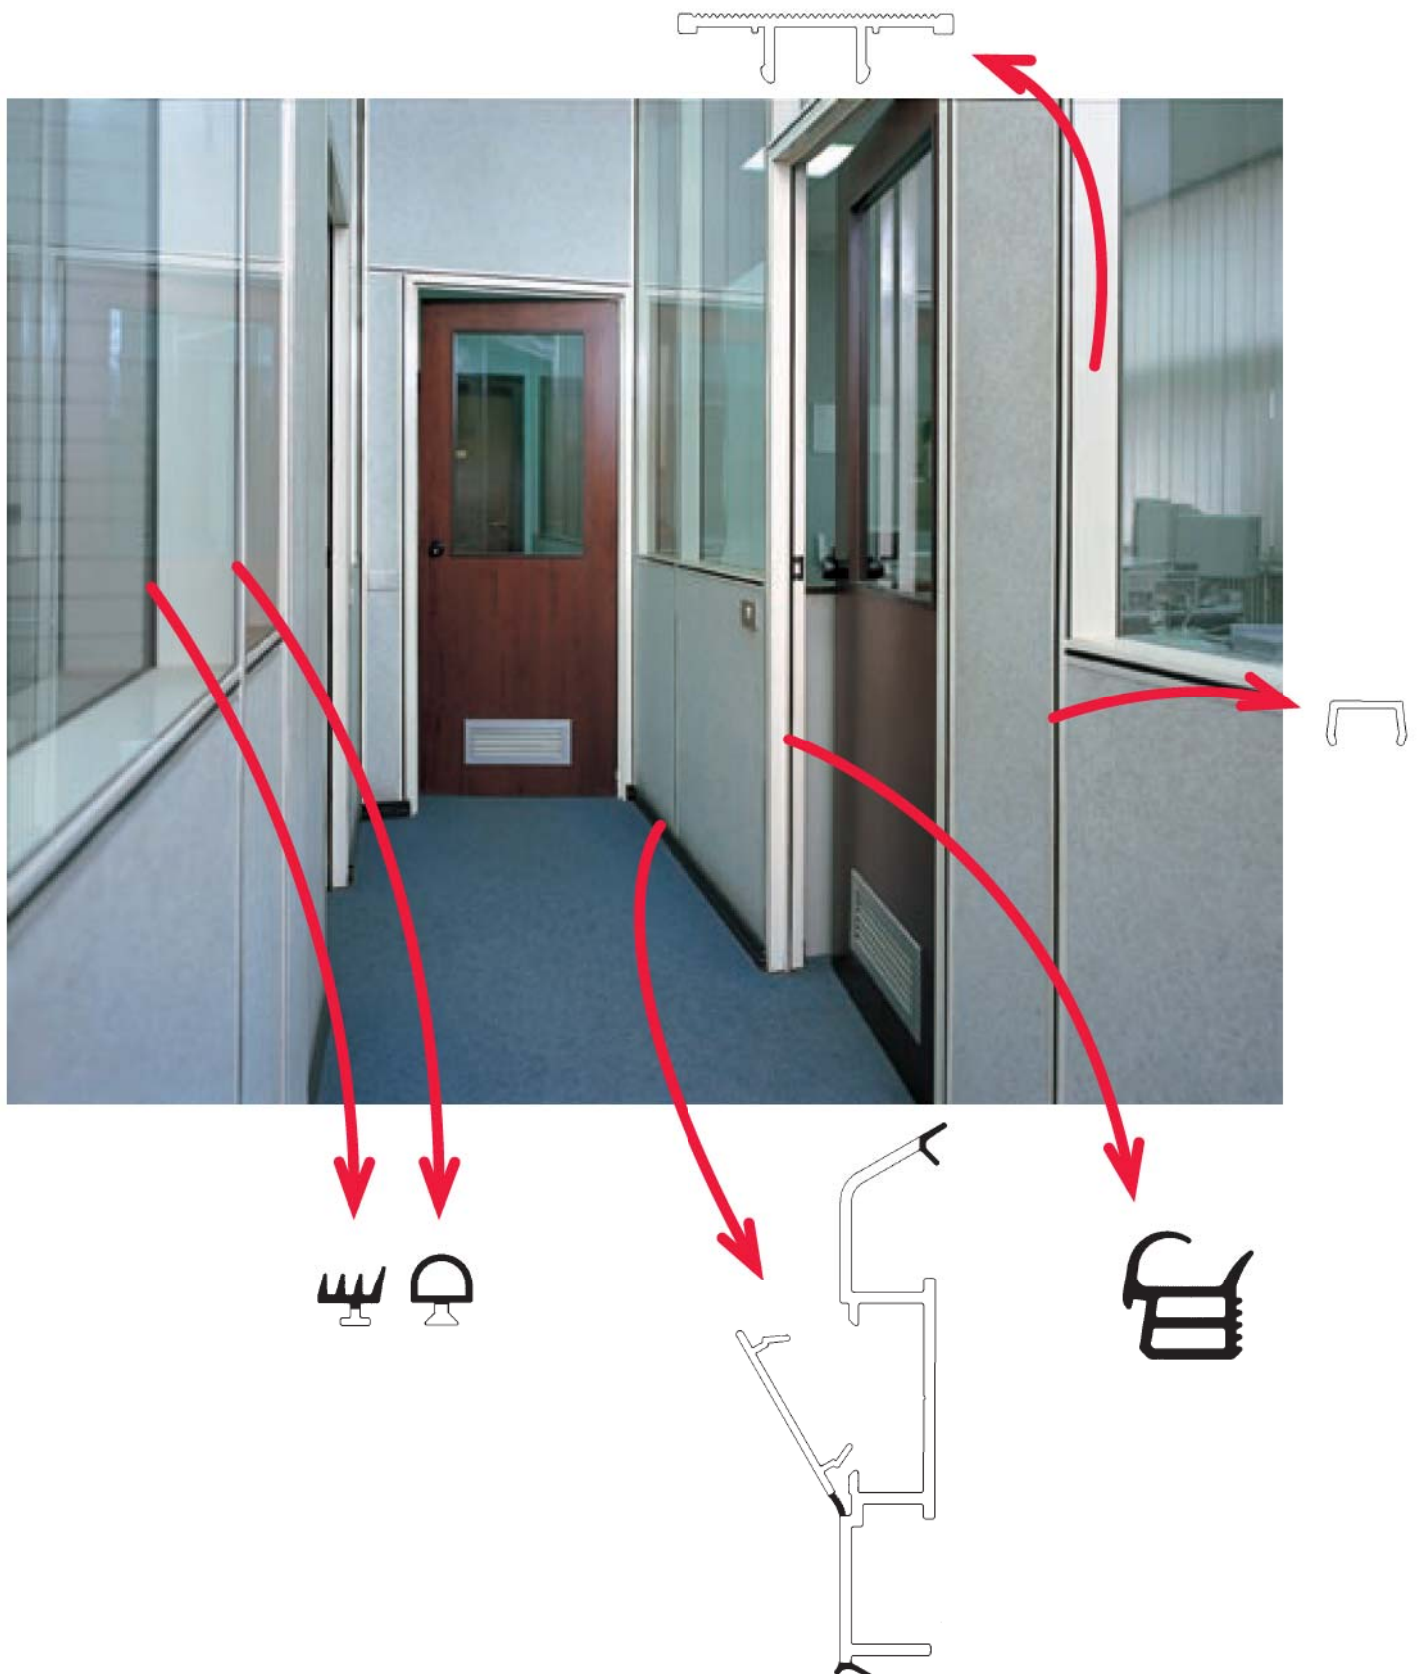

APPLICATION EXAMPLES

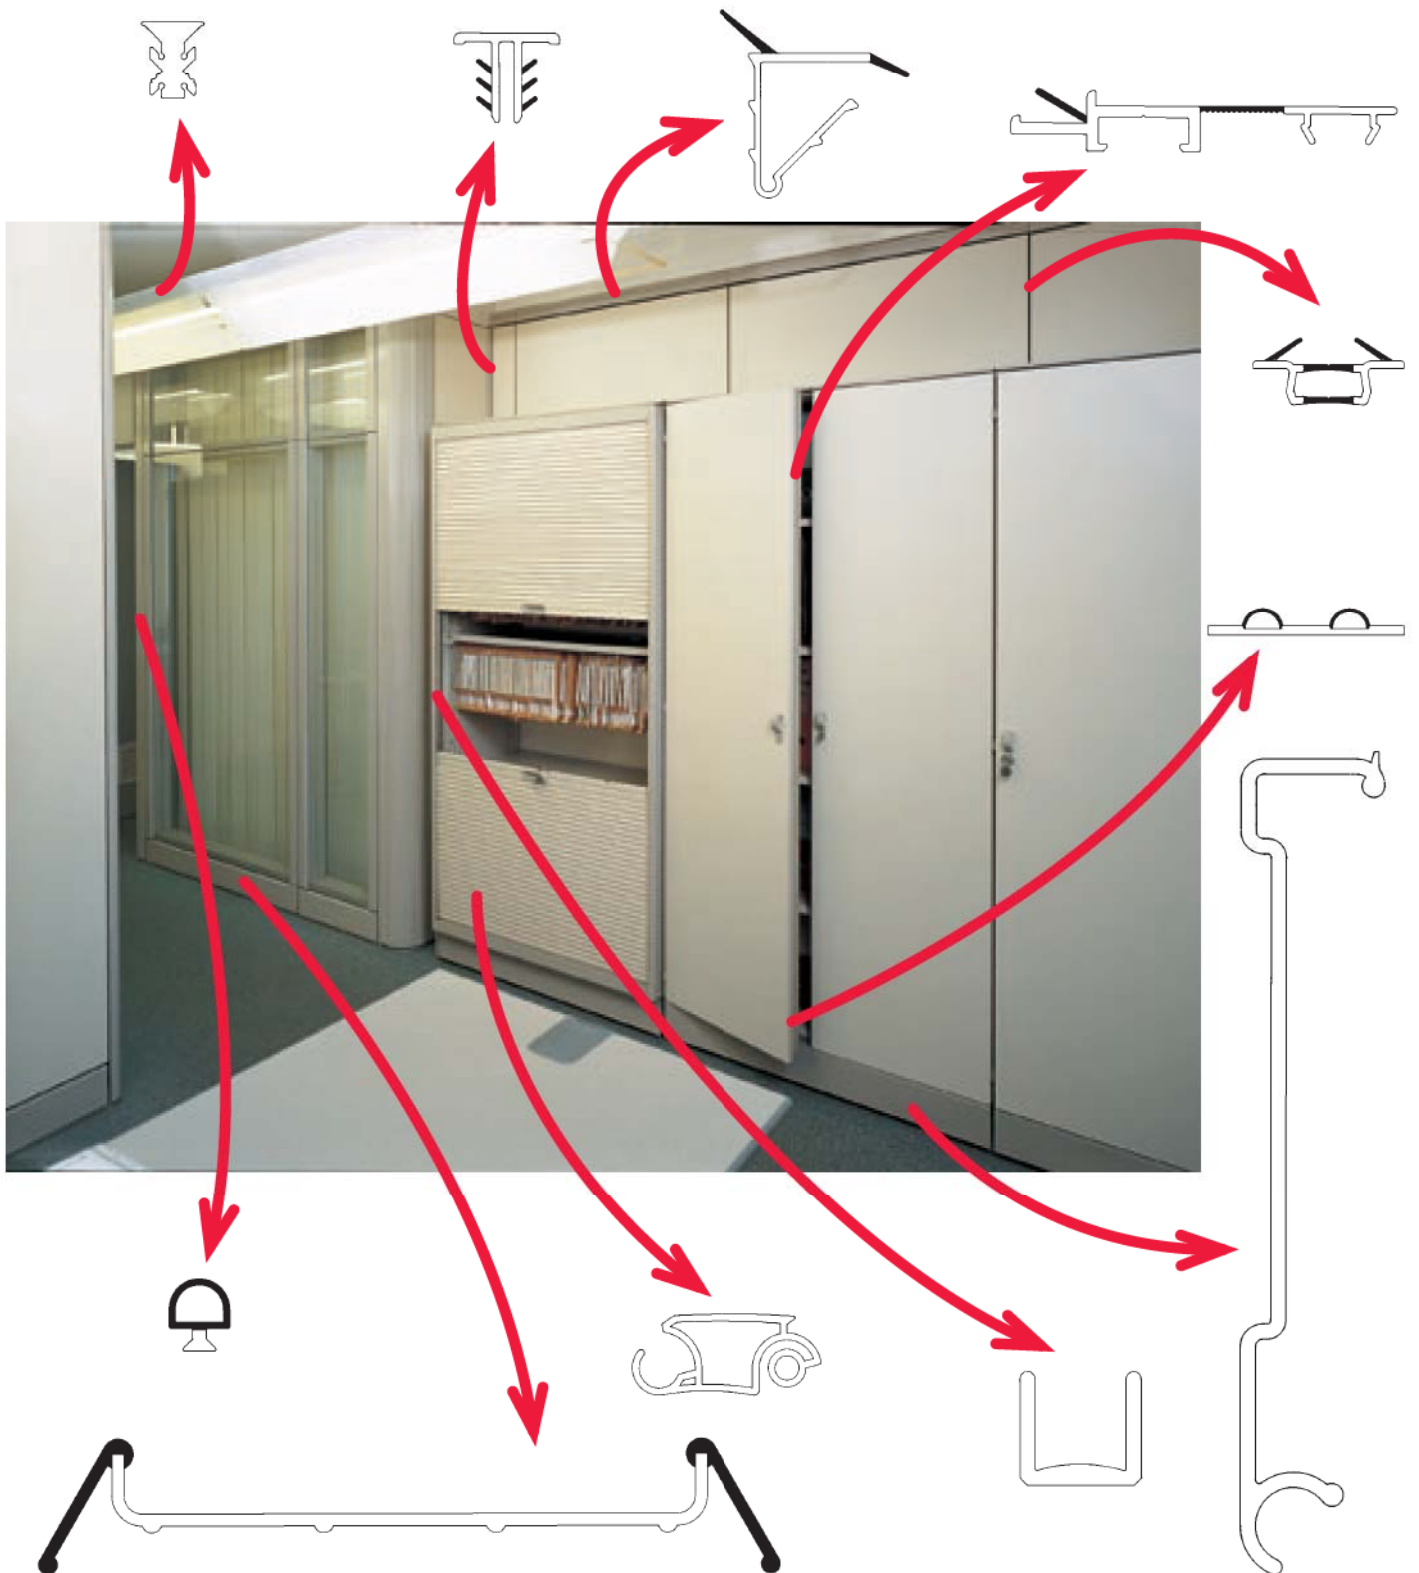

APPLICATION EXAMPLES

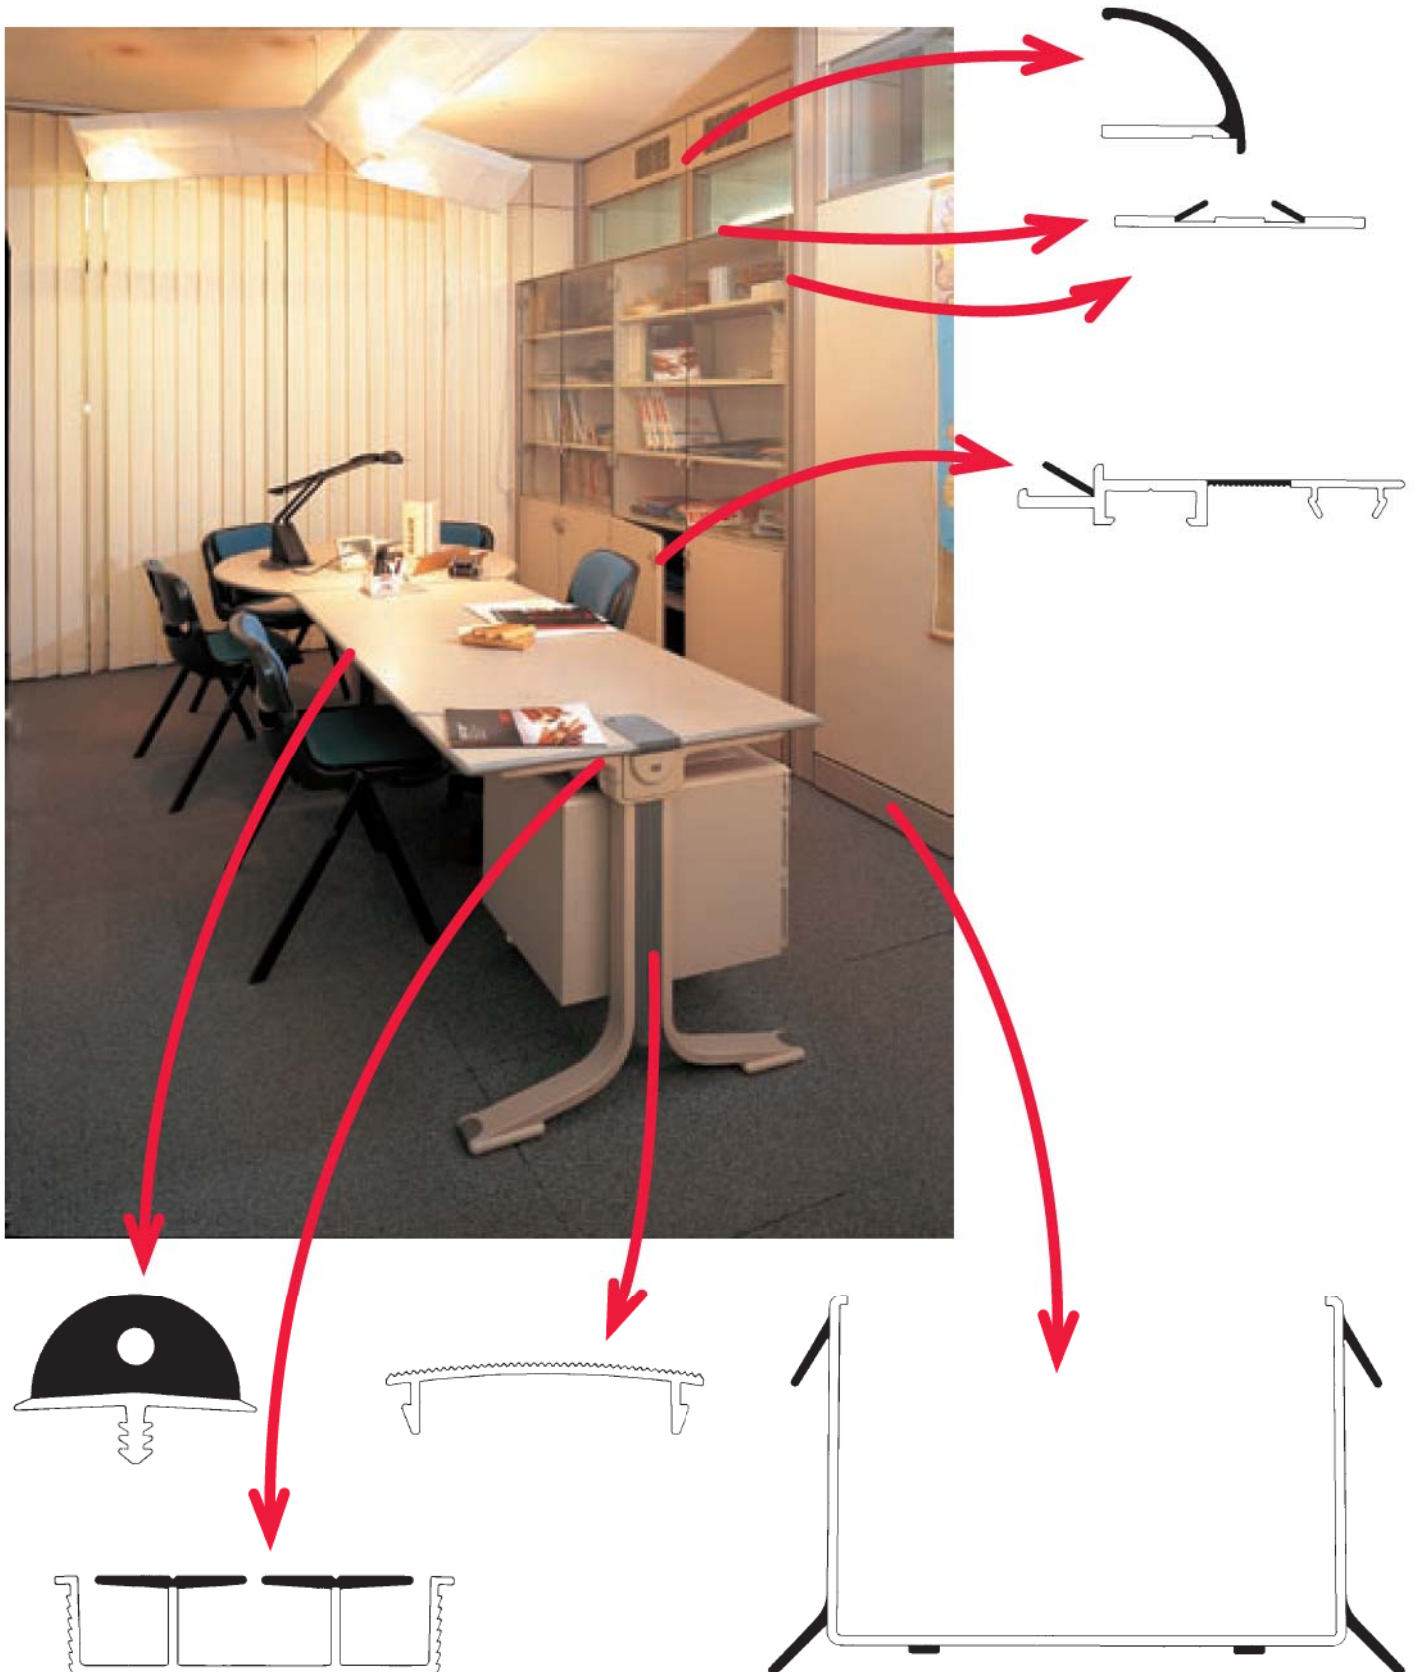

PRODUCTS IN STOCK

DUST SEAL EDGING PROFILES AND DOOR JAMB RABBETS PREPARED WITH PRIMER

C 1221	colours: black
C 1222	colours: black and white
C 1299	colours: black and white
C 1332	colours: black and white
C 1333	colours: black and white
C 1469	colours: brown-white-ivory
C 1559	colours: black
C 1560	colours: black

DOOR RABBIT PROFILES

C 1152	colours: black and white in bars of 3.000 mm.
C 1576	colours: black and white in bars of 3.000 mm
C 1814	colours: opaline, metal, rough in bars of 3.000 mm

PROFILES FOR COMPENSATION STRIPS

C 950	colours: black in bars of 3.000 mm.
C 567	colours: black and white in bars of 3.000 mm

FLEXIBLE ERGONOMIC EDGINGS

F 11	colours: black
F 955	colours: black
F 10	colours: black

FLEXIBLE TUBULAR EDGINGS

F 956	colours: black
F 728	colours: black
F 903	colours: black

CABLE TRUNKING PROFILES

C 1006	colours: black in bars of 3.000 mm.
C 1063	colours: black in bars of 3.000 mm.

DUST SEAL PROFILES

C 283	colours: black and white
C 646	colours: black and white
C 501	colours: black in bars of 3.000 mm.
C 840	colours: black

GASKETS FOR GLASS DOOR FRAMES

C 1455	colours: black in bars of 3.000 mm.
C 1466	colours: black in bars of 3.000 mm.
C 1772	colours: transparent in bars of 3.000 mm.

CO - EXTRUDED JOINT PROFILES

C 1511	colours: black in bars of 2.120 mm.
C 1516	colours: black in bars of 2.120 mm.
C 1545	colours: black in bars of 2.000 mm.

PROFILES AND GASKETS FOR CURTAIN AND INTEGRATED WALLS

F 302	colours: transparent
F 303	colours: transparent
F 304	colours: transparent
EUR 33	colours: black
EUR 34	colours: black
EUR 31	colours: black

BRUSHES

SPASM 6,7X5 3P	colours: gray and black
SPASM 6,7X7 3P	colours: gray and black
SPASM 6,7X11 3P	colours: gray and black
SPASM 6,7X13 3P	colours: gray and black
SPASP 4,8X11 3P	colours: gray and black
SPASP 6,7X7 3P	colours: gray and black
SPASP 6,7X9 3P	colours: gray and black
SPASP 6,7X11 3P	colours: gray and black
SPASP 6,7X13 3P	colours: gray and black


END - CAPS

TS 2500	colours: black
TS 3000	colours: black

SECTION from 1 to 20

STANDARD PROFILES FOR THE FURNITURE INDUSTRY

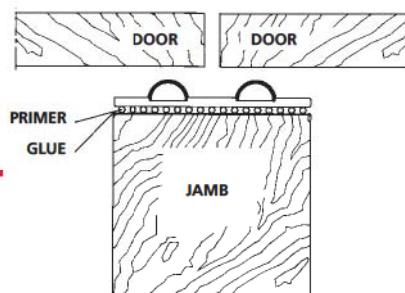DUST SEAL EDGING PROFILES AND DOOR JAMB RABBETS PREPARED WITH PRIMER



LEGEND

F	Flexible
R	Rigid
C	Co-Extruded
.....	Primer

section	product specification
	<p>ARTICLE: C 1221* - trimmable WOOD EFFECT</p> <p>EDGING FOR JAMBS: from 19 ÷ 22 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 8 coils of 40 m (320 total metres).</p>
	<p>ARTICLE: C 1222* - trimmable WOOD EFFECT</p> <p>EDGING FOR JAMBS: from 22 ÷ 28 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 7 coils of 40 m (280 total metres).</p>
	<p>ARTICLE: C 1469* - trimmable WOOD EFFECT</p> <p>EDGING FOR JAMBS: from 16 ÷ 18 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 9 coils of 42 m (375 total metres).</p>
	<p>ARTICLE: C 1400 - trimmable</p> <p>EDGING FOR JAMBS: from 18 ÷ 22 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 4 coils of 80 m (320 total metres).</p>

DESCRIPTION

The new range of edging profiles with primer has been designed to meet the needs of furniture manufacturers, with special attention to the advantages to be gained from using these profiles, the edging profiles prepared with primer have the great advantage of **continuous application** with a beading machine, hence without interrupting the production cycle. They can also be **trimmed** (likewise continuously) in accordance with the used panel thickness, thereby obtaining an end result of high quality. Packing in rings has been studied with particular care in order to reduce costs and improve automatic assembly and storage.

WOOD EFFECT

For information about colours and metres per package, please contact our sales department.

*Item in stock, see on section 0 page XVI

section	product specification
	<p>ARTICLE: C 1299* - trimmable WOOD EFFECT</p> <p>BORDO PER FONDAL: from 8 ÷ 14 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 12 coils of 40 m (480 total metres).</p>
	<p>ARTICLE: C 1300 - trimmable WOOD EFFECT</p> <p>EDGING FOR JAMBS: from 16 ÷ 18 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 9 coils of 40 m (360 total metres).</p>
	<p>ARTICLE: C 1332* - trimmable WOOD EFFECT</p> <p>EDGING FOR JAMBS: from 18 ÷ 25 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 7 coils of 65 m (450 total metres).</p>
	<p>ARTICLE: C 1333* - trimmable WOOD EFFECT</p> <p>EDGING FOR JAMBS: from 16 ÷ 18 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 9 coils of 70 m (630 total metres).</p>
	<p>ARTICLE: C 1353 - trimmable WOOD EFFECT</p> <p>EDGING FOR JAMBS: from 25 ÷ 28 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 7 coils of 44 m (308 total metres).</p>
	<p>ARTICLE: C 1450 - trimmable WOOD EFFECT</p> <p>EDGING FOR JAMBS: from 25 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 4 coils of 50 m (200 total metres).</p>

DESCRIPTION

PRIMER

The primer used, which is of excellent quality, ensures a perfectly tight seal, also under particular application conditions and, at the same time, its original performance characteristics are retained.

The articles **C 1221, C 1222, C 1332, C 1333**, can be supplied with polyester double adhesive of the highest adherence and excellent ageing proof. On request for the other articles.

RESISTANCE TO TRACTION
N/25 mm = 40

ADHERENCE N/25 mm = 20

STANDARD COLOURS:

Ivory - White - Grey - Brown - Black

WOOD EFFECT

For information about colours and metres per package, please contact our sales department.

N.B. For a better application it is advisable to use shaped pressure rollers according to the article section.

*Item in stock, see on section 0 page XVI

DUST SEAL EDGING PROFILES AND DOOR JAMB RABBETS PREPARED WITH PRIMER APPLICABLE BY BEADING MACHINE

LEGEND

F Flexible

R Rigid

C Co-Extruded

..... Primer

section	product specification
	<p>ARTICLE: C 1559* - trimmable WOOD EFFECT</p> <p>EDGING FOR JAMBS: from 19÷22 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 8 coils of 50 m (400 total metres)</p>
	<p>ARTICLE: C 1560* - trimmable WOOD EFFECT</p> <p>EDGING FOR JAMBS: from 19÷22 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 8 coils of 50 m (400 total metres)</p>
	<p>ARTICLE: C 1563 - trimmable WOOD EFFECT</p> <p>EDGING FOR JAMBS: from 25÷28 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 7 coils of 50 m (350 total metres)</p>
	<p>ARTICLE: C 1705 - trimmable</p> <p>EDGING FOR JAMBS: min. 18 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 4 coils of 100 m (400 total metres)</p>
	<p>ARTICLE: C 1758 - trimmable</p> <p>EDGING FOR JAMBS: from 17÷19 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 10 coils of 90 m (900 total metres)</p>

DESCRIPTION

The new range can be applied without changing the pressing rollers of the beading machine. No stop machine is requested in processing.

STANDARD COLOURS:

Ivory - White - Grey - Brown - Black

WOOD EFFECT


For information about colours and metres per package, please contact our sales department.

*Item in stock, see on section 0 page XVI

section	product specification	DESCRIPTION
	<p>ARTICLE: C 1821 - trimmable WOOD EFFECT</p> <p>EDGING FOR JAMBS: from 21 ÷ 25 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 7 coils of 50 m (350 total metres)</p>	<p>The new range can be applied without changing the pressing rollers of the beading machine. No stop machine is requested in processing.</p> <p>STANDARD COLOURS: Ivory - White - Grey - Brown - Black</p>
	<p>ARTICLE: C 2012 - trimmable WOOD EFFECT</p> <p>EDGING FOR JAMBS: fino a 25 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing coils</p>	<p>WOOD EFFECT</p> <p>For information about colours and metres per package, please contact our sales department.</p>
	<p>ARTICLE: C 2018 - trimmable WOOD EFFECT</p> <p>EDGING FOR JAMBS: from 16 ÷ 18 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing coils</p>	
	<p>ARTICLE: C 2057 - trimmable WOOD EFFECT</p> <p>EDGING FOR JAMBS: from 19 ÷ 22 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 4 coils of 75 m (300 total metres)</p>	<p>NEW</p>
	<p>ARTICLE: C 2087 - trimmable WOOD EFFECT</p> <p>EDGING FOR JAMBS: from 18 mm</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing coils</p>	<p>NEW</p>

*Item in stock, see on section 0 page XVI

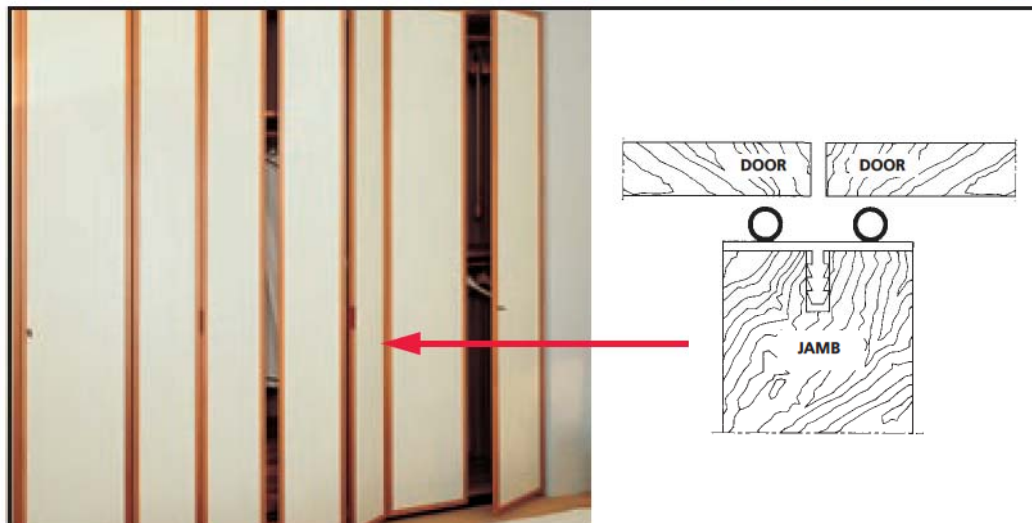DUST SEAL PROFILES AND DOOR JAMB RABBETS



LEGEND

F	Flexible
R	Rigid
C	Co-Extruded

section	product specification
	ARTICLE: C 765 MATERIAL: DURFLEX® APPLICATION: Pressure in cut PACKING: Boxes of 100 Bars
	ARTICLE: C 592 MATERIAL: DURFLEX® APPLICATION: Pressure in cut PACKING: Boxes of 120 Bars
	ARTICLE: C 977 MATERIAL: DURFLEX® APPLICATION: Pressure in cut PACKING: Boxes of 90 Bars
	ARTICLE: C 838 MATERIAL: DURFLEX® APPLICATION: Pressure in cut PACKING: Boxes of 120 Bars

DESCRIPTION



The range of these profiles has been especially designed to accommodate the various available panel sizes. Easy application is ensured thanks to the rigid ESADUR® material. Optimum standards of appearance can be achieved with the various colours experimented by our laboratory.

Package in the form of rugged cardboard boxes affords adequate protection of the profiles during transport and storage.

STANDARD COLOURS:


Ivory - White - Grey - Brown - Black

*Item in stock, see on section 0 page XVI

section	product specification	DESCRIPTION
	<p>ARTICLE: C 1284 MATERIAL: DURFLEX® APPLICATION: Pressure in cut PACKING: Boxes of 150 Bars</p>	<p>The range of these profiles has been especially designed to accommodate the various available panel sizes. Easy application is ensured thanks to the rigid ESADUR® material. Optimum standards of appearance can be achieved with the various colours experimented by our laboratory.</p>
	<p>ARTICLE: C 543 MATERIAL: DURFLEX® APPLICATION: Pressure in cut PACKING: Boxes of 150 Bars</p>	<p>Package in the form of rugged cardboard boxes affords adequate protection of the profiles during transport and storage.</p>

*Item in stock, see on section 0 page XVI

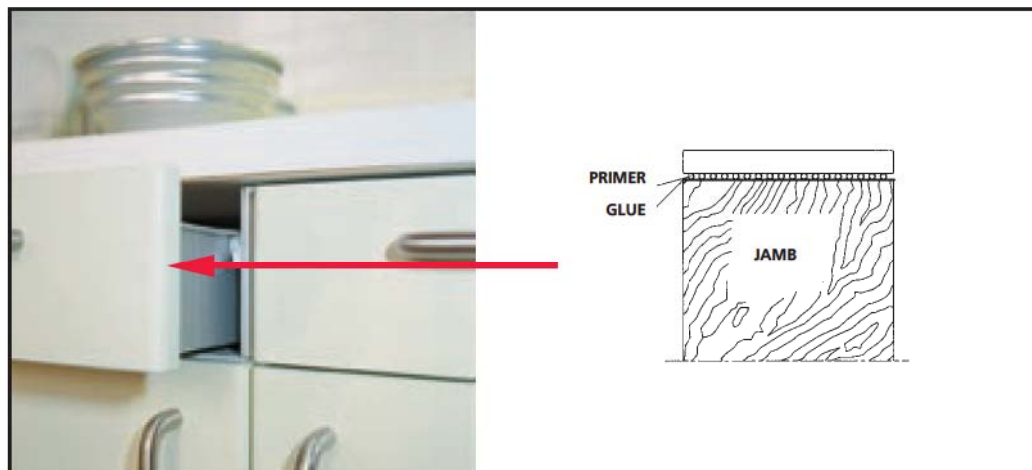EDGEBANDING FOR THE FURNITURE INDUSTRY WITH PRIMER



LEGEND

F	Flexible
R	Rigid
C	Co-Extruded
.....	Primer

section	product specification
	<p>ARTICLE: R 1362 (23 x 2) mm</p> <p>MATERIAL: ESADUR®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 4 coils of 125 m (500 total metres)</p>
	<p>ARTICLE: R 1573 (28 x 2) mm</p> <p>MATERIAL: ESADUR®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 3 coils of 125 m (375 total metres)</p>
	<p>ARTICLE: R 1574 (33 x 2) mm</p> <p>MATERIAL: ESADUR®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 3 coils of 125 m (375 total metres)</p>
	<p>ARTICLE: R 1413 (19 x 3) mm</p> <p>MATERIAL: ESADUR®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 4 coils of 100 m (400 total metres)</p>

DESCRIPTION

FINISHING:

smooth, embossed



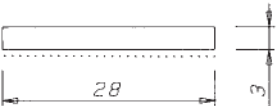
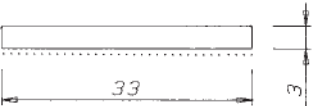

STANDARD COLOURS:

Ivory - White - Grey - Brown - Black

SPECIAL COLOURS:


Aluminium + Ral

*Item in stock, see on section 0 page XVI

section	product specification	DESCRIPTION
	<p>ARTICLE: R 1365 (22 x 3) mm</p> <p>MATERIAL: ESADUR®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 4 coils of 100 m (400 total metres)</p>	<p>FINISHING: smooth, embossed</p> <p>STANDARD COLOURS: Ivory - White - Grey - Brown - Black</p> <p>SPECIAL COLOURS: Aluminium + Ral</p>
	<p>ARTICLE: R 1361 (23 x 3) mm</p> <p>MATERIAL: ESADUR®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 4 coils of 100 m (400 total metres)</p>	
	<p>ARTICLE: R 1478 (28 x 3) mm</p> <p>MATERIAL: ESADUR®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 3 coils of 100 m (300 total metres)</p>	
	<p>ARTICLE: R 1366 (33 x 3) mm</p> <p>MATERIAL: ESADUR®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes containing 3 coils of 100 m (300 total metres)</p>	
	<p>ARTICLE: R 1742 (22x1,3) mm</p> <p>MATERIAL: ESADUR®</p> <p>APPLICATION: Continuous gluing with beading machine, trimming according to panel thickness.</p> <p>PACKING: Boxes (59x59x25)</p>	

*Item in stock, see on section 0 page XVI

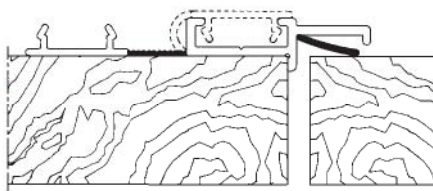DOOR RABBET AND FRAME PROFILES



LEGEND

F	Flexible
R	Rigid
C	Co-Extruded

section	product specification
	ARTICLE: C 850 MATERIAL: DURFLEX® APPLICATION: With screws PACKING: Boxes of 80 Bars
	ARTICLE: C 1232 MATERIAL: DURFLEX® APPLICATION: With screws. Availability of drilled items PACKING: Boxes of 80 Bars
	ARTICLE: C 1372 Tappo: TS 1152 MATERIAL: DURFLEX® APPLICATION: With screws or hidden stapling PACKING: Boxes of 50 Bars
	ARTICLE: C 1152* Tappo: TS 1152 MATERIAL: DURFLEX® APPLICATION: With screws or hidden stapling PACKING: Boxes of 55 Bars

DESCRIPTION

Our range of door rabbet has been designed to offer multiple solutions to customer's problems. All profiles are made of shock-proof DURFLEX® and can be drilled or stapled. The special feature of our range consists of the flexible tongue acting both as rabbet and dust seal. As well as of a covertop with hinge that hides screws and staples.

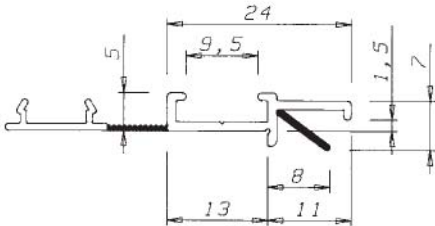
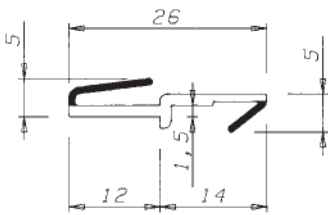

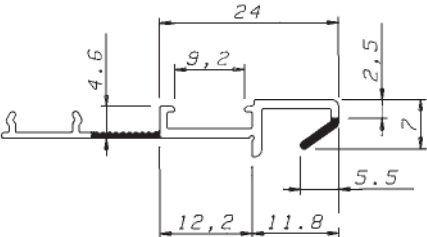
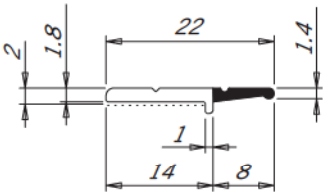
End cap
for art. C 1152 and C 1372



TS 1152


STANDARD COLOURS:
Ivory - White - Grey - Brown - Black

*Item in stock, see on section 0 page XVI

section	product specification	DESCRIPTION
	<p>ARTICLE: C 1576*</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: With screws or hidden stapling</p> <p>PACKING: Boxes of 80 Bars</p>	<p>Our range of door rabbet has been designed to offer multiple solutions to customer's problems. All profiles are made of shock-proof DURFLEX® and can be drilled or stapled. The special feature of our range consists of the flexible tongue acting both as rabbet and dust seal. As well as of a covertedop with hinge that hides screws and staples.</p>
	<p>ARTICLE: C 1475</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: With screws or hidden stapling</p> <p>PACKING: Boxes of 130 Bars</p>	<p>End cap for art. C 1152 and C 1372</p>  <p>TS 1152</p>
	<p>ARTICLE: C 1681</p> <p>MATERIAL: per colori standard DURFLEX®</p> <p>APPLICATION: With screws or hidden stapling</p> <p>PACKING: Boxes of 70 Bars</p>	<p>STANDARD COLOURS: Ivory - White - Grey - Brown - Black</p>
	<p>ARTICLE: C 1814*</p> <p>for transparent grey, transparent, rough</p>	
	<p>ARTICLE: C 1598 with double adhesive</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: with double adhesive</p> <p>PACKING: Boxes of 200 Bars</p>	

*Item in stock, see on section 0 page XVI

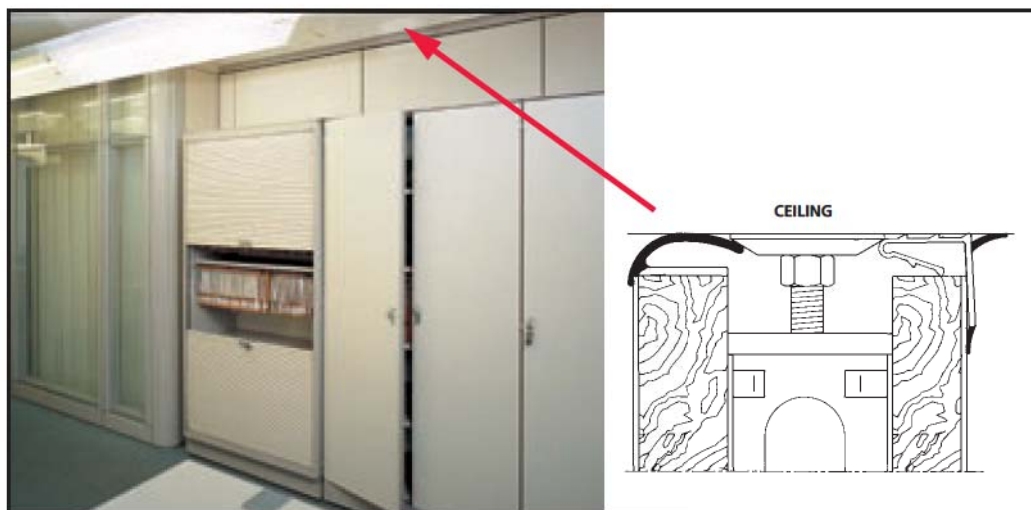PROFILES FOR COMPENSATION STRIPS



LEGEND

F	Flexible
R	Rigid
C	Co-Extruded

section	product specification
	<p>ARTICLE: C 950*</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Clip on</p> <p>PACKING: Boxes of 60 Bars</p>
	<p>ARTICLE: C 567*</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: With screws, staples or double adhesive</p> <p>PACKING: Boxes of 90 Bars</p>
	<p>ARTICLE: C 658</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: With screws, staples</p> <p>PACKING: Boxes of 70 Bars</p>
	<p>ARTICLE: C 1286</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: With screws, staples</p> <p>PACKING: Boxes of 70 Bars</p>

DESCRIPTION


The profiles to specification have been made in co-extrusion with the rigid part of shock - proof ESADUR® so that they can be drilled. Their function is to compensate gaps due to irregularities in the walls or ceilings.

The flexible tongue made of ESAFLEX® arranged according to requirements also **reduces sound propagation**.

STANDARD COLOURS:


Ivory - White - Grey - Brown - Black

*Item in stock, see on section 0 page XVI

section	product specification	DESCRIPTION
	<p>ARTICLE: C 1676</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: With screws, staples or double adhesive</p> <p>PACKING: Boxes of 90 Bars</p>	<p>The profiles to specification have been made in co-extrusion with the rigid part of shock-proof ESADUR® so that they can be drilled. Their function is to compensate gaps due to irregularities in the walls or ceilings.</p>
		<p>The flexible tongue made of ESAFLEX® arranged according to requirements also reduces sound propagation.</p>
		<p>STANDARD COLOURS: Ivory - White - Grey - Brown - Black</p>

*Item in stock, see on section 0 page XVI

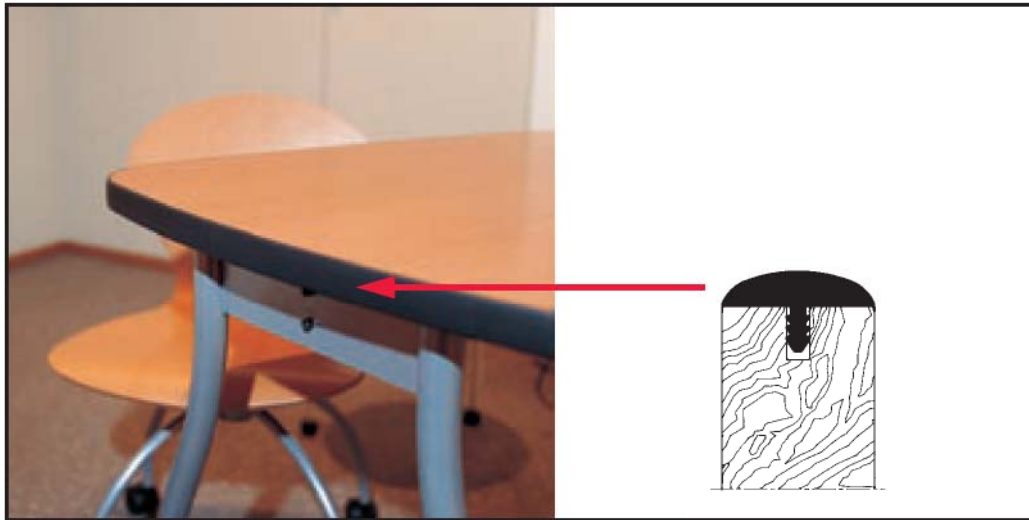FLEXIBLE ERGONOMIC EDGINGS



LEGEND

F	Flexible
R	Rigid
C	Co-Extruded

section	product specification	
	ARTICLE: MATERIAL: APPLICATION: PACKING:	F 1224 ESAFLEX® On panel 15 mm In rolls of 200 m WOOD EFFECT
	ARTICLE: MATERIAL: APPLICATION: PACKING:	F 1166 ESAFLEX® On panel 18 mm In rolls of 200 m WOOD EFFECT
	ARTICLE: MATERIAL: APPLICATION: PACKING:	F 1221 ESAFLEX® On panel 19 mm In rolls of 200 m WOOD EFFECT
	ARTICLE: MATERIAL: APPLICATION: PACKING:	F 11* ESAFLEX® On panel 20 mm In rolls of 150 m WOOD EFFECT

DESCRIPTION

The range of flexible edgings has been designed and developed for various edge trimming applications such as:

- table tops
- cupboard side panels
- desk tops
- conference chairs, etc

The special quality of ESAFLEX® (shore A.90) makes the protective edgings against knocks very versatile in use, as regards both colours and appearance. The edgings can be applied by hand with the aid of pneumatic hammers or with automatic beading machines. These edgings are especially suitable for corners of minimum radius.

SURFACE FINISH:

- Embossed
(Article F 1192 - F 1222 - F 1191)
- Shiny 50 Gloss
- Matt 4 Gloss
- Wood effect

STANDARD COLOURS:

Ivory - White - Grey - Brown - Black




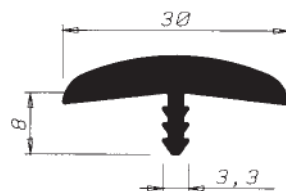
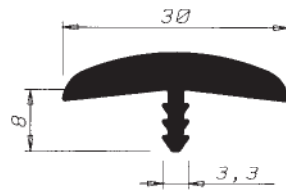

SPECIAL COLOURS:

Blue - Yellow - Red - Green - Pink
Sky/Blue

WOOD EFFECT

For information about colours and metres per package, please contact our sales department. ▶

*Item in stock, see on section 0 page XVI

section	product specification		DESCRIPTION
	ARTICLE: MATERIAL: APPLICATION: PACKING:	F 1192 GOFFRATO ESAFLEX® On panel 20 mm In rolls of 150 m	<p>The range of flexible edgings has been designed and developed for various edge trimming applications such as:</p> <ul style="list-style-type: none"> • table tops • cupboard side panels • desk tops • conference chairs, etc <p>The special quality of ESAFLEX® (shore A.90) makes the protective edgings against knocks very versatile in use, as regards both colours and appearance. The edgings can be applied by hand with the aid of pneumatic hammers or with automatic beading machines. These edgings are especially suitable for corners of minimum radius.</p> <p>SURFACE FINISH:</p> <ul style="list-style-type: none"> • Embossed (Article F 1192 - F 1222 - F 1191) • Shiny 50 Gloss • Matt 4 Gloss • Wood effect <p>STANDARD COLOURS: Ivory - White - Grey - Brown - Black</p> <p>SPECIAL COLOURS: Blue - Yellow - Red - Green - Pink Sky/Blue</p> <p>WOOD EFFECT</p> <p>For information about colours and metres per package, please contact our sales department.</p>
	ARTICLE: MATERIAL: APPLICATION: PACKING:	F 955* ESAFLEX® On panel 25 mm In rolls of 130 m	
	ARTICLE: MATERIAL: APPLICATION: PACKING:	F 1222 GOFFRATO ESAFLEX® On panel 25 mm In rolls of 130 m	
	ARTICLE: MATERIAL: APPLICATION: PACKING:	F 10* ESAFLEX® On panel 30 mm In rolls of 100 m	
	ARTICLE: MATERIAL: APPLICATION: PACKING:	F 1191 GOFFRATO ESAFLEX® On panel 30 mm In rolls of 100 m	
	ARTICLE: MATERIAL: APPLICATION: PACKING:	F 948 ESAFLEX® On panel 20 mm In rolls of 200 m	

*Item in stock, see on section 0 page XVI

section	product specification
	ARTICLE: F 1225 MATERIAL: ESAFLEX® APPLICATION: On panel 25 mm PACKING: In rolls of 120 m WOOD EFFECT
	ARTICLE: F 1117 MATERIAL: ESAFLEX® APPLICATION: On panel 30 mm PACKING: In rolls of 100 m WOOD EFFECT
	ARTICLE: F 1226 MATERIAL: ESAFLEX® APPLICATION: On panel 40 mm PACKING: In rolls of 60 m WOOD EFFECT

DESCRIPTION

The range of flexible edgings has been designed and developed for various edge trimming applications such as:

- table tops
- cupboard side panels
- desk tops
- conference chairs, etc

The special quality of ESAFLEX® (shore A.90) makes the protective edgings against knocks very versatile in use, as regards both colours and appearance. The edgings can be applied by hand with the aid of pneumatic hammers or with automatic beading machines. These edgings are especially suitable for corners of minimum radius.

SURFACE FINISH:

- Embossed (Article F 1192 - F 1222 - F 1191)
- Shiny 50 Gloss
- Matt 4 Gloss
- Wood effect

STANDARD COLOURS:

Ivory - White - Grey - Brown - Black

SPECIAL COLOURS:

Blue - Yellow - Red - Green - Pink
Sky/Blue

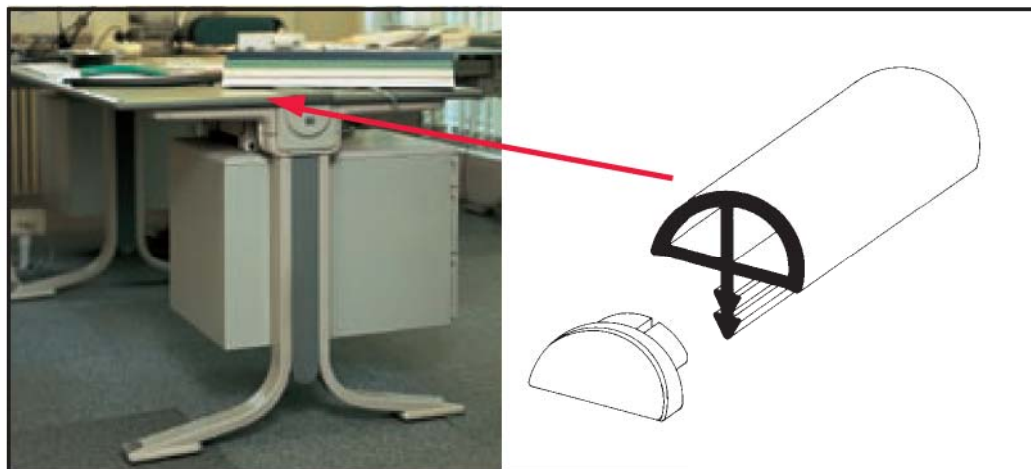
WOOD EFFECT

For information about colours and metres per package, please contact our sales department.

N.B. The nominal shares are referred to the assembled profile.

*Item in stock, see on section 0 page XVI

WORK SAFETY FLEXIBLE TUBULAR EDGINGS



LEGEND

F	Flexible
R	Rigid
C	Co-Extruded

section	product specification	
	ARTICLE: MATERIAL: APPLICATION: PACKING: END CAP: ANGLE JOINT:	F 956* ESAFLEX® On panel 18 mm In rolls of 100 m TS 1800 TS 1890
	ARTICLE: MATERIAL: APPLICATION: PACKING: END CAP: ANGLE JOINT:	F 890 ESAFLEX® On panel 20 mm In rolls of 100 m TS 2000 TS 2090
	ARTICLE: MATERIAL: APPLICATION: PACKING: END CAP:	F 975 ESAFLEX® On panel 22 mm In rolls of 80 m TS 2200
	ARTICLE: MATERIAL: APPLICATION: PACKING: END CAP: ANGLE JOINT:	F 728* ESAFLEX® On panel 25 mm In rolls of 80 m TS 2500* TS 2590

DESCRIPTION


Flexible tubular edgings represent a valid response to office furniture manufacturers.

These edgings have been designed for edge trimming of work tops both acting as a protection against knocks (**work safety regulations**) and appearance, thanks to the wide range of standard and requested colours. The high quality **ESAFLEX®** (shore A.90) material makes the edgings very versatile in use enabling corners even of the minimum radius to be edged.

To avoid pantograph processing, the edgings can be equipped with end caps or 90° angle joints.

WOOD EFFECT

For information about colours and metres per package, please contact our sales department.



Angle joint - end cap to glue

Colours available:
Standard and Special

*Item in stock, see on section 0 page XVI

section	product specification
	ARTICLE: F 1015 MATERIAL: ESAFLEX® APPLICATION: On panel 26 mm PACKING: In rolls of 45 m END CAP: TS 2500* ANGLE JOINT: TS 2590
	ARTICLE: F 903* MATERIAL: ESAFLEX® APPLICATION: On panel 30 mm PACKING: In rolls of 50 m END CAP: TS 3000* ANGLE JOINT: TS 3090
	ARTICLE: F 859 MATERIAL: ESAFLEX® APPLICATION: On panel 35 mm PACKING: Boxes of 28 Bars END CAP: TS 3500

DESCRIPTION

Thanks to the use of new surface finishing, our tubular edgings meet the needs of house furniture manufacturers who make use of them to trim cupboard sides.

SURFACE FINISH:

- Shiny 50 gloss
- Matt 4 gloss
- Wood effect

STANDARD COLOURS:


Ivory - White - Grey - Brown - Black

SPECIAL COLOURS:

Blue - Yellow - Red - Green - Pink - Sky/Blue

WOOD EFFECT

For information about colours and metres per package, please contact our sales department.



Angle joint - end cap to glue

Colours available:

Standard and Special

N.B. The nominal shares are referred to the assembled profile.

*Item in stock, see on section 0 page XVI

TWIN COLOUR AND SINUSOIDAL EDGINGS

LEGEND

F Flexible

R Rigid

C Co-Extruded

section	product specification
	<p>ARTICLE: F 1127</p> <p>MATERIAL: 2 LINE - TWIN COLOUR</p> <p>APPLICATION: ESAFLEX®</p> <p>PACKING: On panel 30 mm</p> <p>END CAP: In rolls of 50 m</p> <p>ANGLE JOINT: TS 3000*</p> <p>TS 3090</p>
	<p>ARTICLE: F 1119</p> <p>MATERIAL: 1 LINE - TWIN COLOURMA-</p> <p>APPLICATION: ESAFLEX®</p> <p>PACKING: On panel 30 mm</p> <p>END CAP: In rolls of 50 m</p> <p>ANGLE JOINT: TS 3000*</p> <p>TS 3090</p>
	<p>ARTICLE: F 1223 SINUSOIDAL</p> <p>MATERIAL: ESAFLEX®</p> <p>APPLICATION: On panel 30 mm</p> <p>PACKING: In rolls of 50 m</p> <p>END CAP: TS 3000*</p> <p>ANGLE JOINT: TS 3090</p>

DESCRIPTION


The new range of twin colour and sinusoidal edgings suits both tubular edging qualities and appearance requirements of even the most demanding designers. All flexible edgings can be installed either by hand with the aid of pneumatic hammers or else with automatic beading machines.

STANDARD COLOURS:

Ivory - White - Grey - Brown - Black

SPECIAL COLOURS:

Blue - Yellow - Red - Green -Pink - Sky/Blue



Angle joint - end cap to glue

Colours available:

Standard and Special

N.B. The nominal shares are referred to the assembled profile.

*Item in stock, see on section 0 page XVI

FLEXIBLE EDGINGS SUITABLE FOR APPLICATIONS BY MACHINES



LEGEND

F	Flexible
R	Rigid
C	Co-Extruded

section	product specification	
	ARTICLE: MATERIAL: APPLICATION: PACKING:	F 1274 ESAFLEX® On panel 18,5 mm In rolls of 130 m WOOD EFFECT
	ARTICLE: MATERIAL: APPLICATION: PACKING:	F 1275 ESAFLEX® On panel 25,5 mm In rolls of 75 m WOOD EFFECT
	ARTICLE: MATERIAL: APPLICATION: PACKING:	F 1276 ESAFLEX® On panel 18,5 mm In rolls of 130 m WOOD EFFECT
	ARTICLE: MATERIAL: APPLICATION: PACKING:	F 1277 ESAFLEX® On panel 25,5 mm In rolls of 80 m WOOD EFFECT

DESCRIPTION

This new range of table edgings has been studied and developed in order to be installed by **semi-automatic machine**. It is appreciated by manufacturers for its large use, for its excellent quality and for its easier application.

SURFACE FINISH:

- Shiny 50 Gloss
- Matt 4 Gloss
- Wood effect

STANDARD COLOURS:

Ivory - White - Grey - Brown - Black

SPECIAL COLOURS:

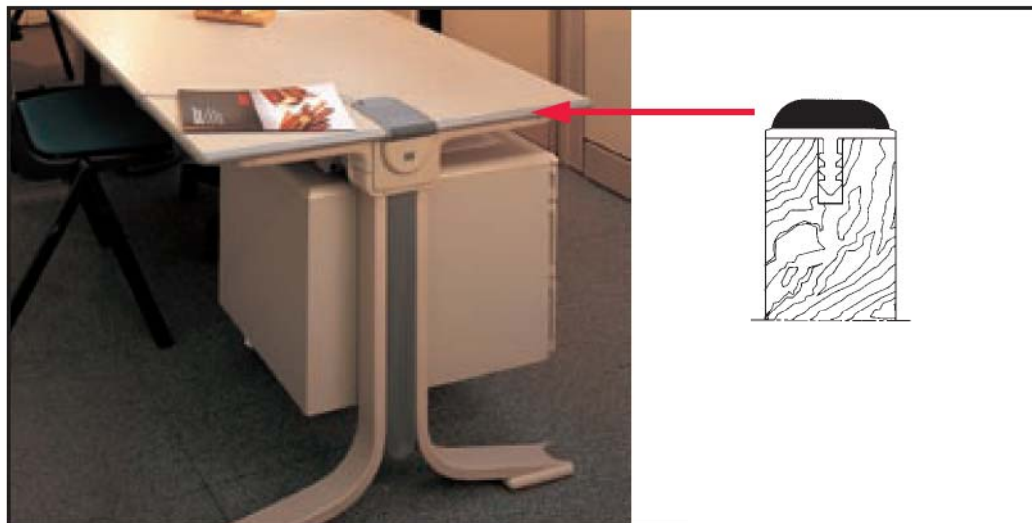
Blue - Yellow - Red - Green - Pink
Sky/Blue

WOOD EFFECT

For information about colours and metres per package, please contact our sales department.

*Item in stock, see on section 0 page XVI

ERGOFLEX EMBOSSED EDGINGS



LEGEND

F	Flexible
R	Rigid
C	Co-Extruded

section	product specification
	<p>ARTICLE: C 1303 - trimmable</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: On panel 16 ÷ 20 mm</p> <p>PACKING: Boxes containing 10 coils of 16 m (160 total metres)</p> <p>SURFACE FINISH: Smooth or embossed</p>
	<p>ARTICLE: C 1318 - trimmable</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: On panel 20 ÷ 23 mm</p> <p>PACKING: Boxes containing 6 coils of 20 m (120 total metres)</p> <p>SURFACE FINISH: Smooth or embossed</p>
	<p>ARTICLE: C 1234 - trimmable</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: On panel 24 ÷ 28 mm</p> <p>PACKING: Boxes containing 5 coils of 20 m (100 total metres)</p> <p>SURFACE FINISH: Smooth or embossed</p>
	<p>ARTICLE: C 1319 - trimmable</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: On panel 28 ÷ 32 mm</p> <p>PACKING: Boxes containing 4 coils of 20 m (80 total metres)</p> <p>SURFACE FINISH: Smooth or embossed</p>

DESCRIPTION

The range of Embossed Edgings has been designed with soft materials (shore A.55) especially for those manufacturers who want to combine with the already good performance of table edgings a marked quality of appearance. Besides **Ergoflex Edgings** can be **trimmed** in accordance with the panel thickness.

SURFACE FINISH:

- Embossed

AVAILABILITY OF TWICE - COLOURED ITEMS

STANDARD COLOURS:

Ivory - White - Grey - Brown - Black

SPECIAL COLOURS:


Blue - Yellow - Red - Green - Pink - Sky/Blue

*Item in stock, see on section 0 page XVI

section	product specification	DESCRIPTION
	<p>ARTICLE: C 1411 - trimmable</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: On panel 28 ÷ 31 mm</p> <p>PACKING: In rolls of 50 m</p> <p>SURFACE FINISH: Smooth</p>	<p>The range of Embossed Edgings has been designed with soft materials (shore A.55) especially for those manufacturers who want to combine with the already good performance of table edgings a marked quality of appearance. Besides Ergoflex Edgings can be trimmed in accordance with the panel thickness.</p>
		<p>SURFACE FINISH:</p> <ul style="list-style-type: none"> • Embossed <p>AVAILABILITY OF TWICE - COLOURED ITEMS</p> <p>STANDARD COLOURS: Ivory - White - Grey - Brown - Black</p>
		<p>SPECIAL COLOURS: Blue - Yellow - Red - Green - Pink - Sky/Blue</p>

*Item in stock, see on section 0 page XVI

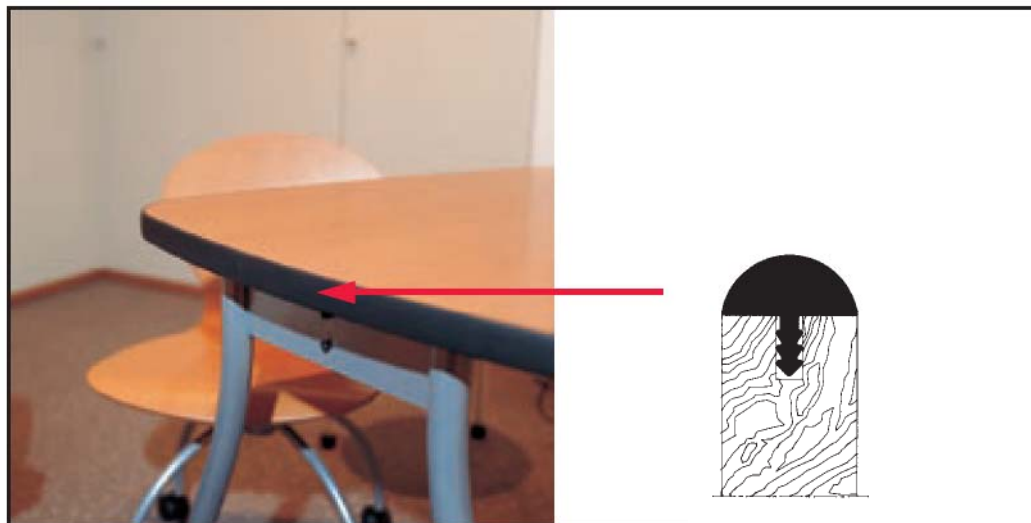COMPACT TABLE EDGINGS



LEGEND

F	Flexible
R	Rigid
C	Co-Extruded

section	product specification	
	ARTICLE: MATERIAL: APPLICATION: PACKING:	F 1193 ESAFLEX® On panel 16 mm In rolls of 180 m WOOD EFFECT
	ARTICLE: MATERIAL: APPLICATION: PACKING:	F 1178 ESAFLEX® On panel 18 mm In rolls of 150 m WOOD EFFECT
	ARTICLE: MATERIAL: APPLICATION: PACKING:	F 1179 ESAFLEX® On panel 25 mm In rolls of 80 m WOOD EFFECT

DESCRIPTION

The range of compact table edgings has been designed to meet the needs of some furniture manufacturers. The edgings can be applied by hand with the aid of pneumatic hammers or with automatic beading machines.

SURFACE FINISH:

- Shiny 50 Gloss
- Matt 4 Gloss
- Wood effect

STANDARD COLOURS:

Ivory - White - Grey - Brown - Black

SPECIAL COLOURS:

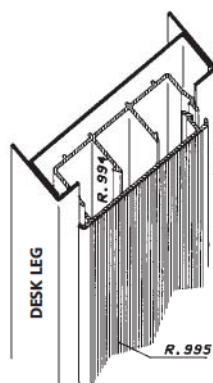
Blue - Yellow - Red - Green
Sky/Blue

WOOD EFFECT

For information about colours and metres per package, please contact our sales department.

*Item in stock, see on section 0 page XVI

CABLE TRUNKING PROFILES



LEGEND

F	Flexible
R	Rigid
C	Co-Extruded

section	product specification
	ARTICLE: R 995 MATERIAL: ESADUR® APPLICATION: R 994 cover top PACKING: Boxes of 44 Bars
	ARTICLE: R 994 MATERIAL: ESADUR® APPLICATION: Assembly on metal PACKING: Boxes of 26 Bars
	ARTICLE: C 1006* MATERIAL: DURFLEX® APPLICATION: With double adhesive or directly in the cut panel PACKING: Boxes of 45 Bars
	ARTICLE: C 1063* MATERIAL: DURFLEX® APPLICATION: With double adhesive or directly in the cut panel PACKING: Boxes of 27 Bars

DESCRIPTION

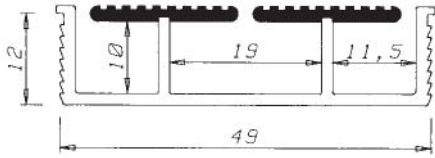
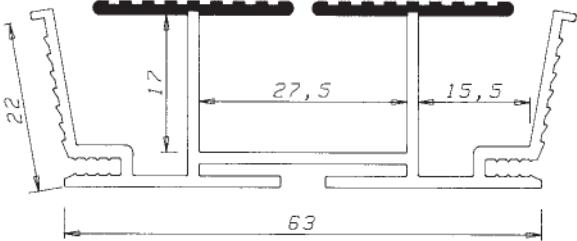
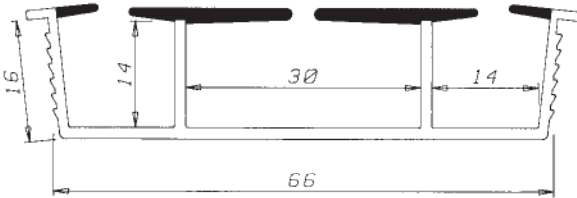
The range of profiles to specification provides full solution to the problem of concealing computer cables, electric wires and telephone leads by inserting them separately one by one, in special insulated compartments simply by lowering flexible tongues.

The cable trunking profiles made of rigid shock - proof ESADUR® are inserted in the desk legs and under the work top, either of wood or metal.

STANDARD COLOURS:


Ivory - White - Grey - Brown - Black

*Item in stock, see on section 0 page XVI

section	product specification	DESCRIPTION
	<p>ARTICLE: C 1202 MATERIAL: DURFLEX® APPLICATION: With double adhesive or directly in the cut panel PACKING: Boxes of 27 Bars</p>	<p>The range of profiles to specification provides full solution to the problem of concealing computer cables, electric wires and telephone leads by inserting them separately one by one, in special insulated compartments simply by lowering flexible tongues.</p>
	<p>ARTICLE: C 1058 MATERIAL: DURFLEX® APPLICATION: With guide or directly in the cut panel PACKING: Boxes of 11 Bars</p>	<p>The cable trunking profiles made of rigid shock - proof ESADUR® are inserted in the desk legs and under the work top, either of wood or metal.</p>
	<p>ARTICLE: C 1176 MATERIAL: DURFLEX® APPLICATION: With double adhesive or directly in the cut panel PACKING: Boxes of 15 Bars</p>	<p>STANDARD COLOURS: Ivory - White - Grey - Brown - Black</p>

*Item in stock, see on section 0 page XVI

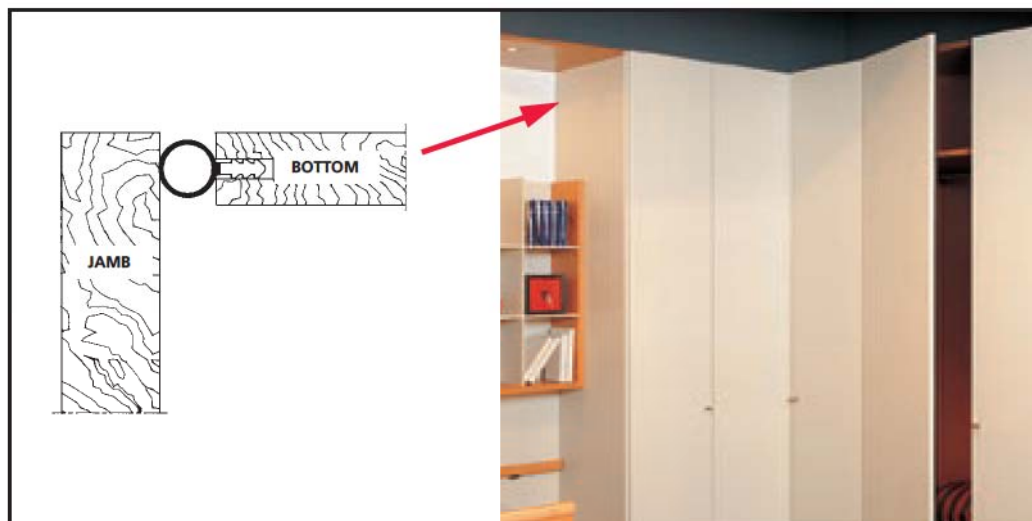DUST SEAL PROFILES



LEGEND

F	Flexible
R	Rigid
C	Co-Extruded

section	product specification	
	ARTICLE: MATERIAL: APPLICATION: PACKING:	C 283* DURFLEX® Pressure in cut Rolls in Boxes of 800 m
	ARTICLE: MATERIAL: APPLICATION: PACKING:	C 501* DURFLEX® Pressure in cut Boxes of 150 Bars
	ARTICLE: MATERIAL: APPLICATION: PACKING:	C 646* DURFLEX® Pressure in cut Rolls in Boxes of 800 m
	ARTICLE: MATERIAL: APPLICATION: PACKING:	C 839 DURFLEX® Pressure in cut Rolls in Boxes of 800 m

DESCRIPTION

Our range of profiles provides the solution to the problem of passage of **dust**.



The flexible ESAFLEX® material with high degree of elasticity enables a perfectly tight fitting on to the panel. Installation times and costs are appreciably reduced thanks to the easy assembly.

Special care has been taken over the packing system which minimizes deformation of the profiles during transport.

STANDARD COLOURS:


Ivory - White - Grey - Brown - Black

*Item in stock, see on section 0 page XVI

section	product specification	DESCRIPTION
	<p>ARTICLE: C 840*</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Pressure in cut</p> <p>PACKING: Rolls in Boxes of 1200 m</p>	<p>Our range of profiles provides the solution to the problem of passage of dust.</p> <p>The flexible ESAFLEX® material with high degree of elasticity enables a perfectly tight fitting on to the panel. Installation times and costs are appreciably reduced thanks to the easy assembly.</p>
	<p>ARTICLE: C 1412</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Pressure in cut</p> <p>PACKING: In rolls of 350 m with separator of coils</p>	<p>Special care has been taken over the packing system which minimizes deformation of the profiles during transport.</p> <p>STANDARD COLOURS: Ivory - White - Grey - Brown - Black</p>

*Item in stock, see on section 0 page XVI

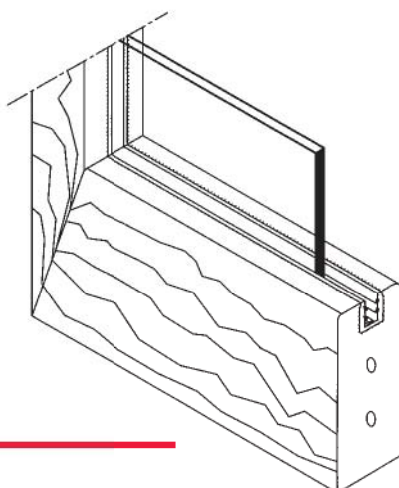GASKETS FOR GLASS DOOR FRAMES



LEGEND

F	Flexible
R	Rigid
C	Co-Extruded

section	product specification
	ARTICLE: C 1455* FOR WOODEN FRAME AND GLASSES OF 4 ÷ 5 mm MATERIAL: DURFLEX® APPLICATION: Pressure in cut PACKING: Boxes of 150 Bars
	ARTICLE: C 1466* FOR ALUMINIUM FRAME AND GLASSES OF 4 mm MATERIAL: DURFLEX® APPLICATION: Inserted in aluminium PACKING: Boxes of 230 Bars
	ARTICLE: C 1468 FOR WOODEN AND ALUMINIUM FRAMES AND GLASSES OF 4 ÷ 6 mm MATERIAL: DURFLEX® APPLICATION: Pressure in cut or mould PACKING: Boxes of 120 Bars
	ARTICLE: C 1404 FOR ALUMINIUM FRAME AND GLASSES OF 5 ÷ 6 mm MATERIAL: DURFLEX® APPLICATION: Inserted in aluminium PACKING: Boxes of 125 Bars

DESCRIPTION

The new range of co-extruded profiles has been created to help all furniture manufacturers who utilize glass doors.

Advantages:

- quick assembling with consequent reduction in costs;
- total removal of glass vibrations.

STANDARD COLOURS:







Ivory - White - Grey - Brown - Black

SPECIAL COLOURS:

Transparent

N.B. IT IS ADVISABLE TO USE GROUND GLASSES.

*Item in stock, see on section 0 page XVI

section	product specification		DESCRIPTION
	ARTICLE: MATERIAL: APPLICATION: PACKING:	C 1480 FOR ALUMINIUM FRAME AND GLASSES OF 4 mm DURFLEX® Inserted in aluminium Boxes of 200 Bars	The new range of co-extruded profiles has been created to help all furniture manufacturers who utilize glass doors. Advantages: <ul style="list-style-type: none"> • quick assembling with consequent reduction in costs; • total removal of glass vibrations.
	ARTICLE: MATERIAL: APPLICATION: PACKING:	C 1558 FOR WOODEN AND ALUMINIUM FRAMES AND GLASSES OF 4 ÷ 5 mm DURFLEX® Pressure in cut o cava Boxes of 150 Bars	STANDARD COLOURS: Ivory - White - Grey - Brown - Black SPECIAL COLOURS: Transparent
	ARTICLE: MATERIAL: APPLICATION: PACKING:	C 1737 FOR ALUMINIUM FRAME AND GLASSES OF 3 mm DURFLEX® Inserted in aluminium Boxes of 350 Bars	
	ARTICLE: MATERIAL: APPLICATION: PACKING:	C 1772* FOR ALUMINIUM FRAME AND GLASSES OF 4 mm DURFLEX® Inserted in aluminium Boxes of 300 Bars	
	ARTICLE: MATERIAL: APPLICATION: PACKING:	C 1970 FOR ALUMINIUM FRAME AND GLASSES OF 4 mm DURFLEX® Inserted in aluminium Boxes of 300 Bars	NEW
	ARTICLE: MATERIAL: APPLICATION: PACKING:	C 1998 PER TELAIO ALLUMINIO CON VETRO DURFLEX® Inserted in aluminium Bobine speciali da 600 m	NEW

*Item in stock, see on section 0 page XVI

N.B. IT IS ADVISABLE TO USE GROUND GLASSES.

section	product specification
	<p>ARTICLE: R 1817 FOR ALUMINIUM FRAME AND GLASSES OF 4 mm</p> <p>MATERIAL: ESADUR®</p> <p>APPLICATION: Inserted in aluminium</p> <p>PACKING: Boxes of 700 Bars</p> <p>NEW</p>

DESCRIPTION

The new range of co-extruded profiles has been created to help all furniture manufacturers who utilize glass doors.

Advantages:

- quick assembling with consequent reduction in costs;
- total removal of glass vibrations.

STANDARD COLOURS:

Ivory - White - Grey - Brown - Black

SPECIAL COLOURS:

Transparent

N.B. IT IS ADVISABLE TO USE GROUND GLASSES.

*Item in stock, see on section 0 page XVI

JOINT RIGID PROFILES

LEGEND

F Flexible

R Rigid

C Co-Extruded

section	product specification
	ARTICLE: R 862 MATERIAL: ESADUR® APPLICATION: Panel joint PACKING: Boxes of 250 Bars
	ARTICLE: R 1057 MATERIAL: ESADUR® APPLICATION: Panel joint PACKING: Boxes of 200 Bars
	ARTICLE: R 1151 MATERIAL: ESADUR® APPLICATION: Panel joint PACKING: Boxes (13x13 cm) of 140 Bars
	ARTICLE: R 1159 MATERIAL: ESADUR® APPLICATION: Panel joint PACKING: Boxes of 350 Bars

DESCRIPTION

The joint rigid profiles already largely used in the wooden windows and doors industries are now becoming very popular even in the furniture industry whenever wooden components have to be joined.

STANDARD COLOURS:

Ivory - White - Grey - Brown - Black

*Item in stock, see on section 0 page XVI

JOINT CO-EXTRUDED PROFILES

LEGEND

F Flexible

R Rigid

C Co-Extruded

section	product specification
	<p>ARTICLE: C 1511*</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Panel joint</p> <p>PACKING: Boxes (13x13 cm) of 130 Bars</p>
	<p>ARTICLE: C 1516*</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Panel joint</p> <p>PACKING: Boxes of 180 Bars</p>
	<p>ARTICLE: C 1545*</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Panel joint</p> <p>PACKING: Boxes (13x13 cm) of 250 Bars</p>

DESCRIPTION

The joint rigid profiles already largely used in the wooden windows and doors industries are now becoming very popular even in the furniture industry whenever wooden components have to be joined.

STANDARD COLOURS:

Ivory - White - Grey - Brown - Black

*Item in stock, see on section 0 page XVI

PROFILES AND GASKETS FOR CURTAIN AND INTEGRATED WALLS

LEGEND

F Flexible

R Rigid

C Co-Extruded

section	product specification
	<p>ARTICLE: C 1584 UPRIGHT PROFILE</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Pressure in iron frames</p> <p>PACKING: Boxes of 120 Bars</p>
	<p>ARTICLE: C 1583 SKIRTING BOARD PROFILE</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Sheet 1,5 mm</p> <p>PACKING: Boxes of 250 Bars</p>
	<p>ARTICLE: F 1320 - UNDER SKIRTING BOARD</p> <p>MATERIAL: ESAFLEX®</p> <p>APPLICATION: Pressure in iron frames</p> <p>PACKING: In rolls of 350 m</p>
	<p>ARTICLE: C 1227 - GAP COVER</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Pressure between two panels</p> <p>PACKING: Boxes of 130 Bars</p>
	<p>ARTICLE: C 1740 COEXTRUDED COVER GAP PROFILE</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Pressure between two panels</p> <p>PACKING: Boxes of 180 Bars</p>

DESCRIPTION

This new range gives a solution to the needs of curtain and integrated walls manufacturers. These gaskets and profiles have to be applied on iron frames, reducing sound propagation.

For further informations on curtain and equipped walls profiles, please see on page:

- doors rabbet profiles;
- dust seal edgings profiles;
- door jamb rabbet profiles;
- gaskets for glass;
- cable trunking skirting board;
- otherwise please contact directly our sales department.

STANDARD COLOURS:

Ivory - White - Grey - Brown - Black

NEW

*Item in stock, see on section 0 page XVI

section	product specification		DESCRIPTION
	ARTICLE: C 1420 COEXTRUDED COVER GAP PROFILE MATERIAL: DURFLEX® APPLICATION: Pressure between two panels PACKING: Rolls in boxes 150 m	NEW	<p>This new range gives a solution to the needs of curtain and integrated walls manufacturers.</p> <p>These gaskets and profiles have to be applied on iron frames, reducing sound propagation.</p> <p>For further informations on curtain and equiped walls profiles, please see on page:</p> <ul style="list-style-type: none"> • doors rabbet profiles; • dust seal edgings profiles; • door jamb rabbet profiles; • gaskets for glass; • cable trunking skirting board; • otherwise please contact directly our sales department.
	ARTICLE: C 1585 SKIRTING BOARD PROFILE MATERIAL: DURFLEX® APPLICATION: Skirting board for iron frame PACKING: Boxes of 9 Bars		
	ARTICLE: C 1891 COEXTRUDED PROFILE FOR PARTY INTERNAL WALL MATERIAL: DURFLEX® APPLICATION: Skirting board for iron frame PACKING: Boxes of 12 Bars	NEW	<p>STANDARD COLOURS: Ivory - White - Grey - Brown - Black</p>
	ARTICLE: C 2028 COEXTRUDED GLAZING GASKET PROFILE FOR GLASSES 4.5 ÷ 6.3 mm MATERIAL: DURFLEX® APPLICATION: Pressure PACKING: Boxes of 100 Bars	NEW	
	ARTICLE: F 302* TRANSPARENT GLAZING GASKET APPLICATION: Pressure MATERIAL: ESAFLEX® PACKING: Rolls in boxes 500 m	NEW	
	ARTICLE: F 303* TRANSPARENT GLAZING GASKET APPLICATION: Pressure MATERIAL: ESAFLEX® PACKING: Rolls in boxes 360 m	NEW	

*Item in stock, see on section 0 page XVI

section	product specification
	<p>ARTICLE: F 304*</p> <p>TRANSPARENT GLAZING GASKET</p> <p>MATERIAL: ESAFLEX®</p> <p>APPLICATION: Pressure</p> <p>PACKING: Rolls in boxes 250 m</p> <p>NEW</p>
	<p>ARTICLE: EUR 33*</p> <p>COEXTRUDED GLAZING GASKET</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: To be inserted</p> <p>PACKING: Rolls in boxes 600 m</p> <p>NEW</p>
	<p>ARTICLE: EUR 34*</p> <p>COEXTRUDED GLAZING GASKET</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: To be inserted</p> <p>PACKING: Rolls in boxes 300 m</p> <p>NEW</p>
	<p>ARTICLE: EUR 31*</p> <p>COEXTRUDED GLAZING GASKET</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: To be inserted</p> <p>PACKING: Rolls in boxes 800 m</p> <p>NEW</p>
	<p>ARTICLE: C 1876</p> <p>COEXTRUDED COVER GAP PROFILE FOR INTERNAL CRYSTAL WALL</p> <p>APPLICATION: With a click</p> <p>MATERIAL: DURFLEX®</p> <p>PACKING: Boxes of 200 Bars</p> <p>NEW</p>
<p>half-scale</p>	<p>ARTICLE: R 1734</p> <p>COEXTRUDED PROFILE FOR THE START OF THE INTERNAL WALL</p> <p>MATERIAL: ESADUR®</p> <p>PACKING: Boxes of 14 Bars</p> <p>NEW</p>

DESCRIPTION

This new range gives a solution to the needs of curtain and integrated walls manufacturers.

These gaskets and profiles have to be applied on iron frames, reducing sound propagation.

For further informations on curtain and equiped walls profiles, please see on page:

- doors rabbet profiles;
- dust seal edgings profiles;
- door jamb rabbet profiles;
- gaskets for glass;
- cable trunking skirting board;
- otherwise please contact directly our sales department.

STANDARD COLOURS:

Ivory - White - Grey - Brown - Black

*Item in stock, see on section 0 page XVI

STANDARD COLOURS:

Ivory - White - Grey -
Brown - Black

SPECIAL COLOURS:

Blue - Yellow - Red - Green -
Pink - Sky/Blue

LEGEND

F Flexible
R Rigid
C Co-Extruded

CABLE TRUNKING SKIRTING BOARD PROFILE + END CAPS

section	product specification
	<p>ARTICLE: C 1564 MATERIAL: DURFLEX® APPLICATION: Cable trunking skirting board PACKING: Boxes of 17 Bars</p>
	<p>ARTICLE: TSC 1564 D MATERIAL: ABS® APPLICATION: Right cap PACKING: Bags of 500 Pieces</p>
	<p>ARTICLE: TSC 1564 S MATERIAL: ABS® APPLICATION: Left cap PACKING: Bags of 500 Pieces</p>

DESCRIPTION

The co-extruded skirting board profile is a development of the traditional one.

These are its advantages:

- to compensate irregularities of floors and walls thanks to the flexible tongues;
- cable trunking auxiliary compartment;
- end caps;
- cheap cost.

HANDLE PROFILE

section	product specification
	<p>ARTICLE: R 1161 MATERIAL: ESADUR® APPLICATION: Pressure in cut PACKING: Boxes of 32 Barre</p>

DESCRIPTION

Handle profile for drawers, frontal of 20 mm

HINGE PROFILE FOR FOLDING - DOOR

section	product specification
	<p>ARTICLE: C 1312 - HINGE FOR FOLDING DOOR MATERIAL: DURFLEX® APPLICATION: Pressure in cut PACKING: Boxes of 40 Bars</p>

DESCRIPTION

The co-extruded hinge profile meets the needs of cupboards manufacturers as to: **performance, appearance, wearing resistance, finishing.**

STANDARD COLOURS:

Ivory - White - Grey -
Brown - Black

SPECIAL COLOURS:

Blue - Yellow - Red - Green -
Pink - Sky/Blue

BI-ADHESIVE CO-EXTRUDED PROFILES

section	product specification
	ARTICLE: C 1323 - WITH BI-ADHESIVE MATERIAL: DURFLEX® APPLICATION: Pressure PACKING: Boxes of 175 Bars
	ARTICLE: C 1405 - WITH BI-ADHESIVE MATERIAL: DURFLEX® APPLICATION: Pressure PACKING: Boxes of 180 Bars

DESCRIPTION

This new range is very popular among all manufacturers of curtain walls who use iron frames by using these profiles you can obtain a good soundproofing.

RESISTANCE TO TRACTION

N/25 mm = 40

ADHERENCE

N/25 mm = 20

WATER GASKET

section	product specification
	ARTICLE: F 1291 MATERIAL: ESAFLEX® APPLICATION: Pressure in aluminium extruded CONFEZIONE: Rolls in Boxes of 400 m

DESCRIPTION

Application on kitchen skirting board and on mirrors for bathroom furniture.

PROFILES FOR CUPBOARDS WITH SLIDING DOORS

section	product specification
	ARTICLE: F 781 - BRUSH HOLDER 7 mm MATERIAL: ESAFLEX® APPLICATION: In cut PACKING: In rolls of 350 m
	ARTICLE: C 1367 - BRUSH HOLDER 5 mm- MATERIAL: DURFLEX® APPLICATION: Pressure in cut PACKING: Short boxes of 200 Bars

DESCRIPTION

Standard measures allow to use a wide range of brushes.



BRUSHES

LEGEND

DIMENSIONS:

b = base

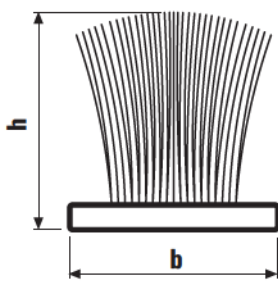
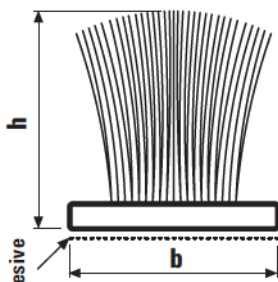
h = pile height

SEAL PILE (SPASP): brush


SEAL MELT(SPASM): brush with bi-adhesive

ATTENTION: according to standardization of packages, the size and the meter quantity may be subject to change.

*in stock

section	product specification
 <p>BRUSH (SEAL PILE)</p>  <p>BRUSH with bi-adhesive (SEAL MELT)</p>	<p>ARTICLE: SPASP 6,7X7 3P SEAL PILE*</p> <p>DIMENSIONS: b 6,7 mm h 7 mm</p> <p>PACKAGE: Rolls in boxes</p> <p>COLOURS: Grey - Black</p>
	<p>ARTICLE: SPASP 6,7X9 3P SEAL PILE*</p> <p>DIMENSIONS: b 6,7 mm h 9 mm</p> <p>PACKAGE: Rolls in boxes</p> <p>COLOURS: Grey - Black</p>
	<p>ARTICLE: SPASP 6,7X11 3P SEAL PILE*</p> <p>DIMENSIONS: b 6,7 mm h 11 mm</p> <p>PACKAGE: Rolls in boxes</p> <p>COLOURS: Grey - Black</p>
	<p>ARTICLE: SPASP 6,7X13 3P SEAL PILE*</p> <p>DIMENSIONS: b 6,7 mm h 13 mm</p> <p>PACKAGE: Rolls in boxes</p> <p>COLOURS: Grey - Black</p>
	<p>ARTICLE: SPASP 4,8X11 3P SEAL PILE*</p> <p>DIMENSIONS: b 4,8 mm h 11 mm</p> <p>PACKAGE: Rolls in boxes</p> <p>COLOURS: Grey - Black</p>
	<p>ARTICLE: SPASM 6,7X5 3P SEAL MELT*</p> <p>DIMENSIONS: b 6,7 mm h 5 mm</p> <p>PACKAGE: Rolls in boxes</p> <p>COLOURS: Grey - Black</p>
	<p>ARTICLE: SPASM 6,7X7 3P SEAL MELT*</p> <p>DIMENSIONS: b 6,7 mm h 7 mm</p> <p>PACKAGE: Rolls in boxes</p> <p>COLOURS: Grey - Black</p>
	<p>ARTICLE: SPASM 6,7X11 3P SEAL MELT*</p> <p>DIMENSIONS: b 6,7 mm h 11 mm</p> <p>PACKAGE: Rolls in boxes</p> <p>COLOURS: Grey - Black</p>
	<p>ARTICLE: SPASM 6,7X13 3P SEAL MELT*</p> <p>DIMENSIONS: b 6,7 mm h 13 mm</p> <p>PACKAGE: Rolls in boxes</p> <p>COLOURS: Grey - Black</p>

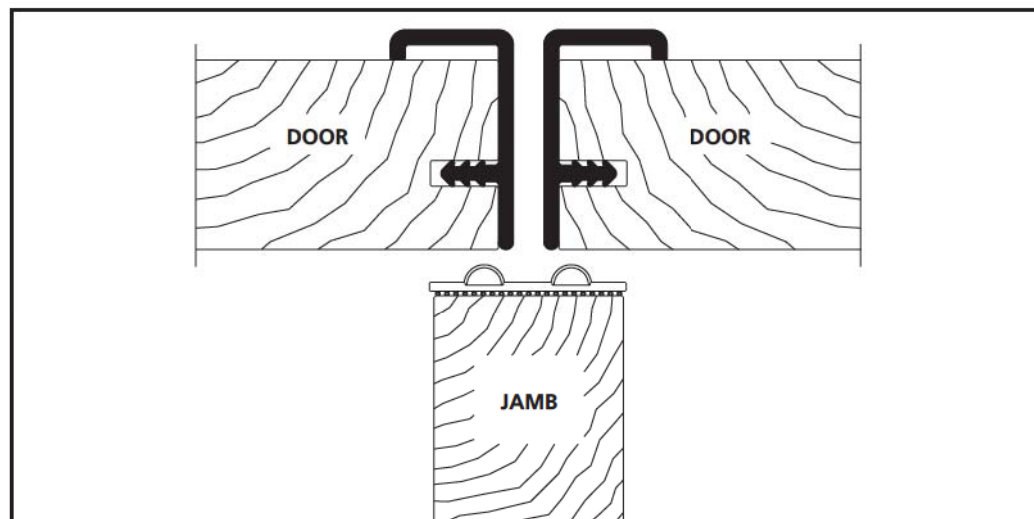FRAMES FOR DOORS



LEGEND

F	Flexible
R	Rigid
C	Co-Extruded
.....	Primer

section	product specification
	ARTICLE: SR 008 FRAME: for frame of 16 mm MATERIAL: DURFLEX® APPLICATION: Pressure in cut PACKING: Long boxes NEW
	ARTICLE: SR 007 FRAME: for frame of 18 mm MATERIAL: DURFLEX® APPLICATION: Pressure in cut PACKING: Long boxes NEW
	ARTICLE: R 1632 FRAME: for frame of 18 mm MATERIAL: DURFLEX® APPLICATION: Pressure in cut PACKING: Long boxes NEW
	ARTICLE: SR 009 FRAME: for frame of 18 mm MATERIAL: DURFLEX® APPLICATION: Pressure in cut PACKING: Long boxes NEW

DESCRIPTION

The new range of profiles for door frames gives a solution to the aesthetic and planning needs. These profiles are made of shock-proof ESADUR® material.

COMPOUNDED

STANDARD COLOURS:

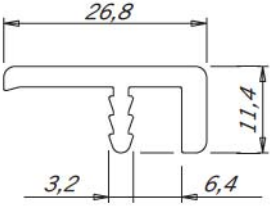
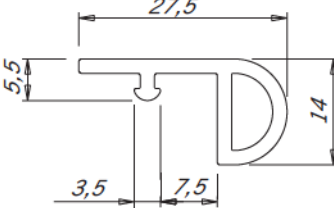
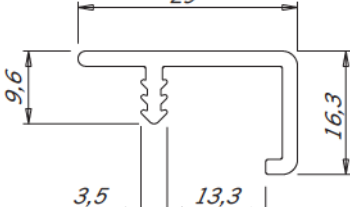
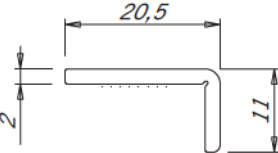
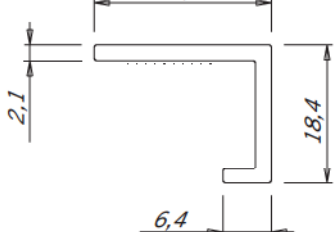

Ivory-White-Grey-Brown-Black

SPECIAL: Rough, Metal, Opaline

COVERING:

Wood Effect* - Metal Effect*

*For more informations about metal and wood effect, please contact our sales department.

section	product specification	DESCRIPTION
	ARTICLE: SR 018 FRAME: for frame of 23 mm MATERIAL: DURFLEX® APPLICATION: Pressure in cut PACKING: Long boxes <div data-bbox="957 459 1093 537">NEW</div>	<p>The new range of profiles for door frames gives a solution to the aesthetic and planning needs. These profiles are made of shock-proof ESADUR® material.</p> <p>COMPOUNDED STANDARD COLOURS: Ivory-White-Grey-Brown-Black</p>
	ARTICLE: SR 005 FRAME: for frame of 18 mm MATERIAL: DURFLEX® APPLICATION: Pressure in cut PACKING: Long boxes <div data-bbox="957 750 1093 828">NEW</div>	<p>SPECIAL: Rough, Metal, Opaline</p> <p>COVERING: Wood Effect* - Metal Effect*</p>
	ARTICLE: R 1858 FRAME: for frame of 25 mm MATERIAL: DURFLEX® APPLICATION: Pressure in cut PACKING: Long boxes <div data-bbox="957 1052 1093 1131">NEW</div>	<p>*For more informations about metal and wood effect, please contact our sales department.</p>
	ARTICLE: SR 017 with double adhesive FRAME: for frame of 18 mm MATERIAL: DURFLEX® APPLICATION: Pressure with bi-adhesive PACKING: Long boxes <div data-bbox="957 1344 1093 1422">NEW</div>	
	ARTICLE: SR 002 with double adhesive FRAME: for frame of 18 mm MATERIAL: DURFLEX® APPLICATION: Pressure with bi-adhesive PACKING: Long boxes <div data-bbox="957 1646 1093 1724">NEW</div>	
	ARTICLE: SR 019 with double adhesive MATERIAL: DURFLEX® APPLICATION: Pressure with bi-adhesive PACKING: Long boxes <div data-bbox="957 1937 1093 2016">NEW</div>	

section	product specification
	<p>ARTICLE: R 1745 with double adhesive</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Pressure with bi-adhesive</p> <p>PACKING: Long boxes</p> <p>NEW</p>
	<p>ARTICLE: SR 020 with double adhesive</p> <p>MATERIAL: DURFLEX®</p> <p>APPLICATION: Pressure with bi-adhesive</p> <p>PACKING: Long boxes</p> <p>NEW</p>

DESCRIPTION

The new range of profiles for door frames gives a solution to the aesthetic and planning needs. These profiles are made of shock-proof ESADUR® material.

COMPOUNDED

STANDARD COLOURS:

Ivory-White-Grey-Brown-Black

SPECIAL: Rough, Metal, Opaline

COVERING:

Wood Effect* - Metal Effect*

*For more informations about metal and wood effect, please contact our sales department.



BMP Πλαστικά Ελλάδος Α.Ε.
Βιομηχανία Παραγωγής
Ελαστικών Παρεμβυσμάτων
ΒΙ.ΠΕ. Σερρών
Σέρρες
Τ.Κ. 621 10
Τ.Θ. 1146
Ελλάδα
Τηλ. +30 23210 77 0 88
FAX: +30 23210 77 0 89